

Injection System VME plus



Threaded Stud V-A



Threaded Stud VMU-A



Threaded Stud VM-A
1 meter length, to be cut to the required length



Internally Threaded Sleeve VMU-IG



Cartridge VME plus 440
Side-by-side cartridge
Content: 440ml



Cartridge VME plus 585
Side-by-side cartridge
Content: 585ml

Range of loading:	3,2 kN–221,6 kN
Concrete quality:	C20/25–C50/60
Material:	Steel, zinc plated, hot dip galvanized, stainless steel A4, stainless steel HCR

Description

The Injection System VME plus is a slow curing injection system based on an epoxy adhesive. Due to the European Technical Assessment for fixings in cracked and uncracked concrete as well as for post-installed rebar connections, it is highly versatile. As the Injection System VME plus does not shrink during curing, it is particularly suitable for fixings requiring high impermeability.

By using the hollow drill bit SB, contamination and dust exposure of the respiratory tract can be reduced to a minimum and subsequent drill hole cleaning is not necessary. As anchoring elements the threaded studs VMU-A, VM-A and V-A, the internally threaded sleeves VMU-IG also standard threaded studs with strength test certificate 3.1 or reinforcement bars can be used.

Advantages

- European Technical Assessment in cracked and uncracked concrete
- Very high, approved loads
- Long processing time, even at high temperatures
- No shrinkage, therefore very high tightness of the fastenings
- Working life 100 years for use in concrete (ETA-19/0483)
- Approved under seismic action of category C1 (threaded studs M8 - M30, reinforcing steel Ø8 - Ø32) and C2 (threaded studs M12 - M24 galvanized steel: FKL ≥8.8, A4, HCR: FKL ≥70)




- For higher loads under seismic action, the annular gap between the anchor rod and the fixing element can be filled using the Filling Washer VS.
- Fire test report for all diameters
- ICC Evaluation Service listing, USA (ESR-4861)
- General design approval by ‚Deutsches Institut für Bautechnik‘ in Berlin, Germany as concrete-to-concrete connector (Z-21.8-2126)
- General design approval by ‚Deutsches Institut für Bautechnik‘ in Berlin, Germany for use in coated concrete members in storage-filling-handling plants with various coating systems (Z-74.8-210, Z-74.8-229, Z-74.8-229, Z-74.8-230, Z-74.1-231)
- ICC Evaluation Service listing, USA (ESR-4004)
- The use of an MKT WHG washer enables marking of WHG-compliant anchoring
- Approved for installation in dry and wet concrete and in water-filled drill holes
- Variable anchorage depths allow flexible adaptation to the respective load situation, reduce the drilling effort and adhesive consumption
- Versatile in application
- The wide range of threaded studs VMU-A, VM-A, V-A and internally threaded sleeves VMU-IG as well as the use of standard threaded studs with strength test certificate 3.1 or reinforcement bars allows any requirement to be met
- Drill hole creation with hammer drill, compressed air drill or hollow drill bit
- Drill hole creation with diamond drill in uncracked concrete without seismic action
- When using the hollow drill bit SB the subsequent cleaning of the borehole is not necessary
- Opened cartridges can be reused with a new static mixer
- Styrene-free

Applications

Heavy duty fastenings in cracked and uncracked concrete: Steel structures, railings, base plates, supports, brackets, facade structures.
Fastenings with rebar in cracked and uncracked concrete with shear force: Shear connectors, wall connecting reinforcement, concrete joints.

Injection Cartridge VME plus

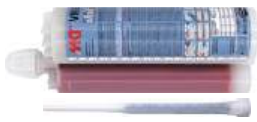

➔ Long processing time

➔ No shrinkage

Description	Ref. No.	Content ml	Content of master box pcs.	Weight per master box kg	Weight per piece kg
Cartridge VME plus 440	28258001	440	12	9,79	0,78
Cartridge VME plus 585	28258243	585	12	12,28	1,02
Cartridge VME plus 1400	28258401	1400	5	12,84	2,52
Static mixer VM-XHP	28305301	-	12	0,18	0,01

One static mixer VM-XHP comes with each cartridge

WHG washer



➔ Aluminium


➔ For marking of WHG compliant fastening

Description	Ref. No.	Suitable for thread	Washer thickness mm	Package content pcs	Weight per package kg
WHG M8	56308001	M8	1.5	10	0,01
WHG M10	56310001	M10	1.5	10	0,01
WHG M12	56312001	M12	1.5	10	0,02
WHG M16	56316001	M16	1.5	10	0,03
WHG M20	56320001	M20	1.5	10	0,05

Usable length static mixer VM-XHP

Drill holes must always be filled from the bottom of the hole to ensure no air pockets are trapped in the adhesive. This is only possible when the tip of the mixing nozzle reaches the very bottom of the drill hole before injecting the adhesive. If the mixing nozzle does not reach the bottom of the drill hole, a mixer extension tube must be used.

Outer diameter mixer:

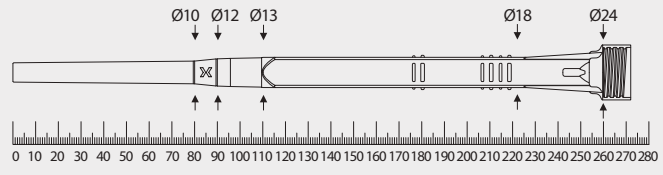

Curing Time Injection Adhesive VME plus

➔ Cartridge temperature when installing +5°C to +40°C

Temperature (°C) of the concrete	maximum working time	minimum curing time	
		dry concrete	wet concrete
0°C to +4°C ¹⁾	90 min	144 h	288 h
+5°C to +9°C	80 min	48 h	96 h
+10°C to +14°C	60 min	28 h	56 h
+15°C to +19°C	40 min	18 h	36 h
+20°C to +24°C	30 min	12 h	24 h
+25°C to +34°C	12 min	9 h	18 h
+35°C to +39°C	8 min	6 h	12 h
+40°C	8 min	4 h	8 h

¹⁾Drill hole temperature 0°C to +4°C for fastenings in concrete (ETA-19/0483)

Accessories for Injection System VME plus

Threaded stud	Internally threaded stud	Rebar Ø mm	Drill bit Ø mm	Blow-out pump ¹⁾ / Air gun ¹⁾	Cleaning brush RB ¹⁾	Retaining Washer VM-IA ²⁾	Extension tube ¹⁾	Dispenser
M8		8	10	VM-ABP 200	RB 10 M6		VM-XE 10	
M10	VMU-IG M6	8 / 10	12	VM-ABP 200	RB 12 M6 RB 12 M8		VM-XE 10	
M12	VMU-IG M8	10 / 12	14	VM-ABP 200	RB 14 M6 RB 14 M8		VM-XE 10	
		12	16	VM-ABP 200	RB 16 M6 RB 16 M8		VM-XE 10	
M16	VMU-IG M10	14	18	VM-ABP 200 / 250 / 500 / 1000	RB 18 M6 RB 18 M8	VM-IA 18	VM-XE 10 VM-XLE 16	
		16	20	VM-ABP 200 / 250 / 500 / 1000	RB 20 M6 RB 20 M8	VM-IA 20	VM-XE 10 VM-XLE 16	
M20	VMU-IG M12	22	22	VM-ABP 250 / 500 / 1000	RB 22 M6	VM-IA 22	VM-XE 10 VM-XLE 16	VM-P 585 Standard, VM-P 585 Profi, VM-P 585 Akku, VM-P 585 Pneumatic VM-P 1400 Pneumatic
		20	25	VM-ABP 250 / 500 / 1000	RB 25 M8 RB 26 M6	VM-IA 25	VM-XE 10 VM-XLE 16	
M24	VMU-IG M16	28	28	VM-ABP 250 / 500 / 1000	RB 28 M6	VM-IA 28	VM-XE 10 VM-XLE 16	
		24 / 25	32	VM-ABP 250 / 500 / 1000	RB 32 M6 RB 32 M8	VM-IA 32	VM-XE 10 VM-XLE 16	
M30	VMU-IG M20	28	35	VM-ABP 250 / 500 / 1000	RB 35 M6 RB 35 M8	VM-IA 35	VM-XE 10 VM-XLE 16	
		32	40	VM-ABP 250 / 500 / 1000	RB 40 M6	VM-IA 40	VM-XE 10 VM-XLE 16	
See page				179	180	182	181	182 / 183

¹⁾When using the MKT hollow drill SB (see page 177) the subsequent cleaning of the borehole is not necessary

²⁾If the static mixer does not reach the bottom of the borehole (see usable length of static mixer), an extension tube must be used. From a drill-Ø d₀ ≥ 18 mm, retaining washer and extension tube must be used for overhead installation and for drill hole depths > 250 mm.

Threaded studs for Injection System VME plus

Threaded stud VMU-A

Steel, zinc plated 5.8
Dimensions see page 173



- For use in structures subject to dry internal conditions
- Steel, zinc plated 8.8 on demand

Threaded stud VMU-A fvz

Steel, hot dip galvanized 5.8
Dimensions see page 173



- For use in structures subject to dry internal conditions

Threaded stud VMU-A A4

Stainless steel A4-70
Dimensions see page 173



- For use in structures subject to dry internal conditions or external atmospheric exposure
- Stainless steel HCR on request

Internally threaded sleeve VMU-IG

Steel, zinc plated 5.8
Dimensions see page 175



- For use in structures subject to dry internal conditions
- With internal thread

Internally threaded sleeve VMU-IG A4

Stainless steel A4-70
Dimensions see page 175



- For use in structures subject to dry internal conditions or external atmospheric exposure
- With internal thread

Threaded stud V-A

Steel, zinc plated 5.8
Dimensions see page 174



- For use in structures subject to dry internal conditions

Threaded stud V-A fvz

Steel, hot dip galvanized 5.8
Dimensions see page 174



- For use in structures subject to dry internal conditions

Threaded stud V-A 8.8

Steel, zinc plated 8.8
Dimensions see page 174



- For use in structures subject to dry internal conditions

Threaded stud V-A A4

Stainless steel A4-70
Dimensions see page 174



- For use in structures subject to dry internal conditions or external atmospheric exposure

Threaded stud V-A HCR

Stainless steel HCR-70
Dimensions see page 174



- For use in particularly corrosive environments
- High corrosion resistant steel 1.4529 (HCR)

Threaded stud VM-A

Steel 5.8, zinc plated
Dimensions see page 175



- For use in structures subject to dry internal conditions
- Threaded studs, of 1 meter length, to be cut to the required length
- Comes with manufacturer's certificate (3.1 EN 10204) in every package

Threaded stud VM-A 8.8

Steel 8.8, zinc plated
Dimensions see page 175



- For use in structures subject to dry internal conditions
- Threaded studs, of 1 meter length, to be cut to the required length
- Comes with manufacturer's certificate (3.1 EN 10204) in every package

Threaded stud VM-A

Stainless steel A4-70
Dimensions see page 175



- For use in structures subject to dry internal conditions or external atmospheric exposure
- Threaded studs, of 1 meter length, to be cut to the required length
- Comes with manufacturer's certificate (3.1 EN 10204) in every package



Extract from Permissible Service Conditions of European Technical Assessment ETA-19/0483 for use in cracked and uncracked concrete (Option 1)

Approved loads according to EN 1992-4 for single anchors without the influence of spacing and edge distances for working life of up to 50 years in dry and wet concrete for temperature range I -40°C to +24°C (short term temperature +40°C) and for temperature range II -40°C to +50°C (short term temperature +72°C). The influence of the sustained load has been taken into account by the factor $\Psi_{sus} = 1,0$ and the total safety factor (γ_M and γ_P) is included. For further details and temperature ranges see ETA. Load capacities under fire exposure see page 201.

Loads and performance data

Injection System VME plus, threaded stud steel 5.8				M8	M10	M12	M16	M20	M24	M27	M30	
Range of anchorage depths	$h_{ef,min} - h_{ef,max}$	[mm]		60 - 160	60 - 200	70 - 240	80 - 320	90 - 400	96 - 480	108 - 540	120 - 600	
Approved loads, tension for $h_{ef,min} - h_{ef,max}$ cracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. N	[kN]	5,0 - 8,6	6,3 - 13,8	9,6 - 20,0	11,7 - 37,1	14,0 - 58,1	15,4 - 83,8	18,4 - 109,5	21,6 - 133,3
	50°C/72°C ¹⁾	C20/25	appr. N	[kN]	4,3 - 8,6	5,4 - 13,8	8,8 - 20,0	11,7 - 37,1	14,0 - 58,1	15,4 - 83,8	18,4 - 109,5	21,6 - 133,3
Approved loads, tension for $h_{ef,min} - h_{ef,max}$ uncracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. N	[kN]	8,6	10,9 - 13,8	13,7 - 20,0	16,8 - 37,1	20,0 - 58,1	22,0 - 83,8	26,3 - 109,5	30,8 - 133,3
	50°C/72°C ¹⁾	C20/25	appr. N	[kN]	8,6	10,9 - 13,8	13,7 - 20,0	16,8 - 37,1	20,0 - 58,1	22,0 - 83,8	26,3 - 109,5	30,8 - 133,3
Approved loads, shear for $h_{ef,min} - h_{ef,max}$ cracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. V	[kN]	6,3	9,7	14,3	23,5 - 26,9	28,0 - 42,3	30,8 - 60,6	36,8 - 78,9	43,1 - 96,0
	50°C/72°C ¹⁾	C20/25	appr. V	[kN]	6,3	9,7	14,3	23,5 - 26,9	28,0 - 42,3	30,8 - 60,6	36,8 - 78,9	43,1 - 96,0
Approved loads, shear for $h_{ef,min} - h_{ef,max}$ uncracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. V	[kN]	6,3	9,7	14,3	26,9	40,0 - 42,3	44,1 - 60,6	52,6 - 78,9	61,6 - 96,0
	50°C/72°C ¹⁾	C20/25	appr. V	[kN]	6,3	9,7	14,3	26,9	40,0 - 42,3	44,1 - 60,6	52,6 - 78,9	61,6 - 96,0

Injection System VME plus, threaded stud steel 8.8												
Approved loads, tension for $h_{ef,min} - h_{ef,max}$ cracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. N	[kN]	5,0 - 13,4	6,3 - 20,9	9,6 - 31,9	11,7 - 59,5	14,0 - 93,3	15,4 - 134,3	18,4 - 175,2	21,6 - 213,8
	50°C/72°C ¹⁾	C20/25	appr. N	[kN]	4,3 - 11,5	5,4 - 18,0	8,8 - 30,2	11,7 - 53,6	14,0 - 83,8	15,4 - 120,6	18,4 - 152,7	21,6 - 188,5
Approved loads, tension for $h_{ef,min} - h_{ef,max}$ uncracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. N	[kN]	10,9 - 13,8	10,9 - 21,9	13,7 - 31,9	16,8 - 59,5	20,0 - 93,3	22,0 - 134,3	26,3 - 175,2	30,8 - 213,8
	50°C/72°C ¹⁾	C20/25	appr. N	[kN]	10,8 - 13,8	10,9 - 21,9	13,7 - 31,9	16,8 - 59,5	20,0 - 93,3	22,0 - 134,3	26,3 - 175,2	30,8 - 213,8
Approved loads, shear for $h_{ef,min} - h_{ef,max}$ cracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. V	[kN]	8,6	12,6 - 13,1	19,2 - 19,4	23,5 - 36,0	28,0 - 56,0	30,8 - 80,6	36,8 - 105,1	43,1 - 128,0
	50°C/72°C ¹⁾	C20/25	appr. V	[kN]	8,6	10,8 - 13,1	17,6 - 19,4	23,5 - 36,0	28,0 - 56,0	30,8 - 80,6	36,8 - 105,1	43,1 - 128,0
Approved loads, shear for $h_{ef,min} - h_{ef,max}$ uncracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. V	[kN]	8,6	13,1	19,4	33,5 - 36,0	40,0 - 56,0	44,1 - 80,6	52,6 - 105,1	61,6 - 128,0
	50°C/72°C ¹⁾	C20/25	appr. V	[kN]	8,6	13,1	19,4	33,5 - 36,0	40,0 - 56,0	44,1 - 80,6	52,6 - 105,1	61,6 - 128,0

Injection System VME plus, threaded stud stainless steel A4-70, HCR-70												
Approved loads, tension for $h_{ef,min} - h_{ef,max}$ cracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. N	[kN]	5,0 - 9,9	6,3 - 15,7	9,6 - 22,5	11,7 - 42,0	14,0 - 65,3	15,4 - 94,3	18,4 - 57,4	21,6 - 70,2
	50°C/72°C ¹⁾	C20/25	appr. N	[kN]	4,3 - 9,9	5,4 - 15,7	8,8 - 22,5	11,7 - 42,0	14,0 - 65,3	15,4 - 94,3	18,4 - 57,4	21,6 - 70,2
Approved loads, tension for $h_{ef,min} - h_{ef,max}$ uncracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. N	[kN]	9,9	10,9 - 15,7	13,7 - 22,5	16,8 - 42,0	20,0 - 65,3	22,0 - 94,3	26,3 - 57,4	30,8 - 70,2
	50°C/72°C ¹⁾	C20/25	appr. N	[kN]	9,9	10,9 - 15,7	13,7 - 22,5	16,8 - 42,0	20,0 - 65,3	22,0 - 94,3	26,3 - 57,4	30,8 - 70,2
Approved loads, shear for $h_{ef,min} - h_{ef,max}$ cracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. V	[kN]	6,0	9,2	13,7	23,5 - 25,2	28,0 - 39,4	30,8 - 56,8	34,5	42,0
	50°C/72°C ¹⁾	C20/25	appr. V	[kN]	6,0	9,2	13,7	23,5 - 25,2	28,0 - 39,4	30,8 - 56,8	34,5	42,0
Approved loads, shear for $h_{ef,min} - h_{ef,max}$ uncracked concrete												
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. V	[kN]	6,0	9,2	13,7	25,2	39,4	44,1 - 56,8	34,5	42,0
	50°C/72°C ¹⁾	C20/25	appr. V	[kN]	6,0	9,2	13,7	25,2	39,4	44,1 - 56,8	34,5	42,0

Spacing and edge distance											
Min. thickness of concrete for $h_{ef,min} - h_{ef,max}$	h_{min}	[mm]		100 - 190	100 - 230	100 - 270	116 - 356	134 - 444	152 - 536	168 - 600	190 - 670
Minimum spacing	s_{min}	[mm]		40	50	60	75	95	115	125	140
Minimum edge distance	c_{min}	[mm]		35	40	45	50	60	65	75	80


Installation parameters											
Drill hole diameter	d_o	[mm]		10	12	14	18	22	28	30	35
Clearance hole in the fixture for Pre-setting installation	$d_{f \leq}$	[mm]		9	12	14	18	22	26	30	33
Clearance hole in the fixture for Through-setting installation	$d_{f \leq}$	[mm]		12	14	16	20	24	30	33	40
Range of drill hole depth for $h_{ef,min} - h_{ef,max}$	h_o	[mm]		60 - 160	60 - 200	70 - 240	80 - 320	90 - 400	96 - 480	108 - 540	120 - 600
Installation torque	$T_{inst \leq}$	[Nm]		10	20	40 (FKL4.6: 35)	60	100	170	250	300
Amount of adhesive per 100 mm drill hole depth		[ml]		6,53	8,16	9,82	13,61	17,89	32,25	30,69	48,67

¹⁾ max. long term temperature / max. short term temperature

Higher concrete strength may lead to higher approved loads. Using a hollow drill bit without subsequent cleaning can lead to lower loads in uncracked concrete. Technical data see European Technical Assessment ETA-19/0483

For anchor designing, an easy to operate Software is available on request or can be downloaded at www.mkt.de

Installation

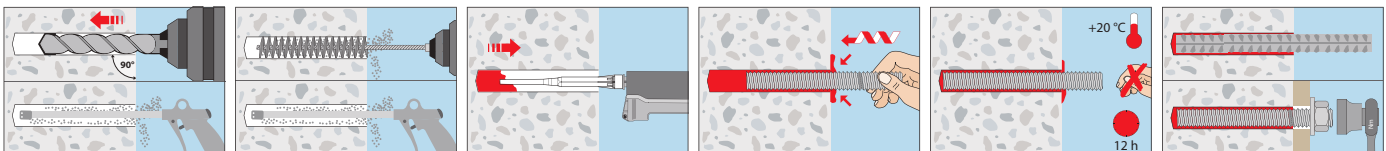



Extract from Permissible Service Conditions of European Technical Assessment ETA-19/0483 for use in cracked and uncracked concrete (Option 1)

Approved loads according to EN 1992-4 for single anchors without the influence of spacing and edge distances for working life of up to 50 years in dry and wet concrete for temperature range I -40°C to +24°C (+40°C¹⁾ and for temperature range II -40°C to +50°C (short term temperature +72°C). The influence of the sustained load has been taken into account by the factor $\Psi_{sus} = 1,0$ and the total safety factor (γ_M and γ_P) is included. For further details and temperature ranges see ETA.

Loads and performance data				Temperature range I -40°C to +24°C(+40°C ¹⁾ and temperature range II -40°C to +50°C(+72°C ¹⁾								
Internally Threaded Sleeve				IG M6 x 80	IG M6 x 90	IG M8 x 80	IG M8 x 100	IG M10 x 80	IG M10 x 100	IG M12 x 125	IG M16 x 170	IG M20 x 200
Anchorage depth h_{ef}		[mm]		80	90	80	100	80	100	125	170	200
Injection System VME plus, Internally Threaded Sleeve VMU-IG steel 5.8												
Approved loads, tension for h_{ef}												
Cracked concrete	C20/25	appr. N	[kN]	4,8	4,8	8,1	8,1	11,7	13,8	20,0	36,2	46,4
Uncracked concrete	C20/25	appr. N	[kN]	4,8	4,8	8,1	8,1	13,8	13,8	20,0	36,2	58,6
Approved loads, shear for h_{ef}												
Cracked concrete	C20/25	appr. N	[kN]	3,4	3,4	5,7	5,7	9,7	9,7	14,3	25,7	42,3
Uncracked concrete	C20/25	appr. N	[kN]	3,4	3,4	5,7	5,7	9,7	9,7	14,3	25,7	42,3
Injection System VME plus, Internally Threaded Sleeve VMU-IG Stainless steel A4-70, HCR-70												
Approved loads, tension for h_{ef}												
Cracked concrete	C20/25	appr. N	[kN]	5,3	5,3	9,9	9,9	11,7	15,7	22,5	36,3	31,0
Uncracked concrete	C20/25	appr. N	[kN]	5,3	5,3	9,9	9,9	15,7	15,7	22,5	42,0	31,0
Approved loads, shear for h_{ef}												
Cracked concrete	C20/25	appr. N	[kN]	3,2	3,2	6,0	6,0	9,2	9,2	13,7	25,2	18,6
Uncracked concrete	C20/25	appr. N	[kN]	3,2	3,2	6,0	6,0	9,2	9,2	13,7	25,2	18,6
Spacing and edge distance												
Min. thickness of concrete	h_{min}	[mm]		110	120	110	130	116	136	169	226	270
Minimum spacing	s_{min}	[mm]		50	50	60	60	75	75	95	115	140
Minimum edge distance	c_{min}	[mm]		40	40	45	45	50	50	60	65	80
Installation parameters												
Drill hole diameter	d_o	[mm]		12	12	14	14	18	18	22	28	35
Clearance hole in the fixture	$d_f \leq$	[mm]		7	7	9	9	12	12	14	18	22
Drill hole depth	h_o	[mm]		80	90	80	100	80	100	125	170	200
Installation torque	$T_{inst} \leq$	[Nm]		10	10	10	10	20	20	40	60	100
Amount of adhesive per 100mm drill hole		[ml]		6,6	7,4	7,9	9,9	10,9	13,6	22,4	54,9	97,4

¹⁾Max. long term temperature/max. short term temperature

Higher concrete strength may lead to higher approved loads. Using a hollow drill bit without subsequent cleaning can lead to lower loads in uncracked concrete. Technical data see European Technical Assessment ETA-19/0483.

For anchor designing, an easy to operate Software is available on request or can be downloaded at www.mkt.de.

Loads and performance data				Temperature range I -40°C to +24°C(+40°C ¹⁾ and temperature range II -40°C to +50°C(+72°C ¹⁾									
Injection System VME plus, rebar B500B				ø8	ø10	ø12	ø14	ø16	ø20	ø24	ø25	ø28	ø32
Range of anchorage depths	$h_{ef,min} - h_{ef,max}$	[mm]		60 - 160	60 - 200	70 - 240	75 - 280	80 - 320	90 - 400	96 - 480	100 - 500	112 - 560	128 - 640
Approved loads, tension for $h_{ef,min} - h_{ef,max}$													
cracked concrete													
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. N [kN]	5,0 - 13,4	6,3 - 20,9	9,6 - 31,2	10,7 - 42,4	11,7 - 55,4	14,0 - 86,6	15,4 - 124,6	16,4 - 135,2	19,4 - 169,6	23,7 - 221,6
	50°C/72°C ¹⁾	C20/25	appr. N [kN]	4,3 - 11,5	5,4 - 18,0	8,8 - 30,2	10,7 - 41,1	11,7 - 53,6	14,0 - 83,8	15,4 - 120,6	16,4 - 130,9	19,4 - 164,2	23,7 - 214,5
uncracked concrete													
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. N [kN]	10,9 - 13,8	10,9 - 21,6	13,7 - 31,2	15,2 - 42,4	16,8 - 55,4	20,0 - 86,6	22,0 - 124,6	23,4 - 135,2	27,8 - 169,6	33,9 - 221,6
	50°C/72°C ¹⁾	C20/25	appr. N [kN]	8,6 - 13,8	10,8 - 21,6	13,7 - 31,2	15,2 - 42,4	16,8 - 55,4	20,0 - 86,6	22,0 - 124,6	23,4 - 135,2	27,8 - 169,6	33,9 - 221,6
Approved loads, shear for $h_{ef,min} - h_{ef,max}$													
cracked concrete													
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. V [kN]	6,5	10,1	14,5	19,8	23,5 - 25,9	28,0 - 40,4	30,8 - 58,2	32,8 - 63,1	38,9 - 79,2	47,5 - 103,4
	50°C/72°C ¹⁾	C20/25	appr. V [kN]	6,5	10,1	14,5	19,8	23,5 - 25,9	28,0 - 40,4	30,8 - 58,2	32,8 - 63,1	38,9 - 79,2	47,5 - 103,4
uncracked concrete													
Range of temperature	24°C/40°C ¹⁾	C20/25	appr. V [kN]	6,5	10,1	14,5	19,8	25,9	40,0 - 40,4	44,1 - 58,2	46,9 - 63,1	55,5 - 79,2	67,8 - 103,4
	50°C/72°C ¹⁾	C20/25	appr. V [kN]	6,5	10,1	14,5	19,8	25,9	40,0 - 40,4	44,1 - 58,2	46,9 - 63,1	55,5 - 79,2	67,8 - 103,4
Spacing and edge distance													
Min. thickness of concrete for $h_{ef,min} - h_{ef,max}$	h_{min}	[mm]		100 - 190	100 - 230	100 - 270 / 102 - 272 ²⁾	111 - 316	120 - 360	140 - 450	160 - 544	164 - 564	182 - 630	208 - 720
Minimum spacing	s_{min}	[mm]		40	50	60	70	75	95	120	120	130	150
Minimum edge distance	c_{min}	[mm]		35	40	45	50	50	60	70	70	75	85
Installation parameters													
Drill hole diameter	d_o	[mm]		10/12 ³⁾	12/14 ²⁾	14/16 ²⁾	18	20	25	32	32	35	40
Range of drill hole depth for $h_{ef,min} - h_{ef,max}$	h_o	[mm]		60 - 160	60 - 200	70 - 240	75 - 280	80 - 320	90 - 400	96 - 480	100 - 500	112 - 560	128 - 640
Amount of adhesive per 100mm drill hole depth		[ml]		4,16/8,46 ³⁾	5,07/10,12 ³⁾	5,97/11,78 ³⁾	13,44	15,09	23,11	44,65	40,03	44,22	57,32

¹⁾Max. long term temperature/max. short term temperature

²⁾For rebar ø8, ø10 and ø12 both drill hole diameters are possible

³⁾The first value applies to the smaller drill diameter, the second value to the larger drill diameter.

Higher concrete strength may lead to higher approved loads. Using a hollow drill bit without subsequent cleaning can lead to lower loads in uncracked concrete. Technical data see European Technical Assessment ETA-19/0483.

For anchor designing, an easy to operate Software is available on request or can be downloaded at www.mkt.de.