

DECLARAȚIA DE PERFORMANȚĂ

DoP Nr.: MKT-711 - ro


- ◇ **Cod unic de identificare al produsului-tip:** șurub beton BSZ
- ◇ **Utilizare (utilizări) preconizată (preconizate):** Ancora mecanică pentru ancorare în beton, a se vedea anexa / Annex B
- ◇ **Fabricant:** MKT Metall-Kunststoff-Technik GmbH & Co.KG
Auf dem Immel 2
67685 Weilerbach
- ◇ **Sistem sau sisteme de evaluare și verificare a constanței performanței:** 1
- ◇ **Documentul de evaluare european:** EAD 330232-00-0601
Evaluarea tehnică europeană: ETA-16/0204, 19.09.2019
Organismul de evaluare tehnică: DIBt, Berlin
Organism (organisme) notificat(e): NB 1343 – MPA, Darmstadt

◇ **Performanța (performanțe) declarată (declarate):**

| Caracteristici esențiale | Performanță |
|---|------------------------------|
| Rezistență mecanică și stabilitate (BWR 1) | |
| Rezistențe caracteristice sub sarcină la tracțiune (efecte statice și cvasistatice) | Anexa / Annex C1 |
| Rezistențe caracteristice sub stres transversal (efecte statice și cvasistatice) | Anexa / Annex C1 |
| Rezistență caracteristică și deplasări pentru categoria de performanță seismică C1 + C2 | Anexa / Annex C2, C3, C4, C7 |
| Schimbări (efecte statice și cvasistatice) | Anexa / Annex C6 |
| Durabilitate | Anexa / Annex B1 |
| Securitatea la incendiu (BWR 2) | |
| Comportamentul la foc | Clasa A1 |
| Rezistență la foc | Anexa / Annex C5 |

Performanța produsului de mai sus este performanța / performanța declarată. Producătorul de mai sus este singurul responsabil de întocmirea declarației de performanță în conformitate cu Regulamentul (EU) nr. 305/2011.

Semnată pentru și în numele fabricantului de către:


Stefan Weustenhagen
(Director general)
Weilerbach, 19.09.2019

p.p. 
Dipl.-Ing. Detlef Bigalke
(Sef de dezvoltare a produselor)



Originalul acestei declarații de performanță a fost scris în limba germană. În cazul abaterilor în traducere, versiunea germană este validă.

Specifications of Intended use

| Concrete screw BSZ | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | |
|--|---|-------|----|-------|----|----|--------|----|----|--------|----|-----|--------|-----|-----|
| Nominal anchorage depth h_{nom} [mm] | | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 |
| Anchorage subject to | Static or quasi-static loading | ✓ | | ✓ | | | ✓ | | | ✓ | | | ✓ | | |
| | Fire exposure | ✓ | | ✓ | | | ✓ | | | ✓ | | | ✓ | | |
| | Seismic action C1 | - | | - | | ✓ | - | | ✓ | - | | ✓ | - | | ✓ |
| | Seismic action C2 (concrete screw BSZ, zinc plated) | - | | - | | ✓ | - | | ✓ | - | | ✓ | - | | ✓ |
| Base material | Cracked or uncracked concrete | ✓ | | ✓ | | | ✓ | | | ✓ | | | ✓ | | |
| | Reinforced or unreinforced concrete (without fibres) acc. to EN 206:2013 | ✓ | | ✓ | | | ✓ | | | ✓ | | | ✓ | | |
| | Strength classes according to EN 206:2013: C20/25 to C50/60 | ✓ | | ✓ | | | ✓ | | | ✓ | | | ✓ | | |

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc plated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure including industrial and marine environment or exposure to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternation immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorage are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design method of anchorages under static or quasi-static load according to EN 1992-4:2018 and EOTA Technical Report TR 055.

The design method of anchorages under shear load according to EN 1992-4:2018, section 6.2.2. also applies for the specified diameter d_f of the clearance hole in the fixture in Annex B2, Table B1

Installation:

- Making of drill hole by hammer drilling (all sizes) or vacuum drill bit (BSZ 8 – BSZ 14).
When using a vacuum drill bit no drill hole cleaning is required.
- Anchor installation carried out by appropriately qualified personal and under the responsibility of the person responsible for technical matters on site.
- After installation further turning of the anchor is not possible. The head of the anchor is supported on the fixture and is not damaged.
- The borehole may be filled with injection mortar with a compressive strength of 40 N/mm² (e.g. MKT Injection mortar VMZ, VMH or VMU plus).
- Adjustment according to Annex B4: for concrete bolts BSZ 8 to BSZ 14, all anchorage depths for static or quasi-static loads.

Concrete Screw BSZ

Intended use
Specifications

Annex B1

Table B1: Installation parameters

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | |
|---|-----------------|------|-------|----|-------|----|----|--------|----|----|--------|----|-----|--------|-----|-----|
| Nominal embedment depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 |
| Nominal drill bit diameter | d_0 | [mm] | 6 | | 8 | | | 10 | | | 12 | | | 14 | | |
| Cutting diameter of drill bit | $d_{cut} \leq$ | [mm] | 6,40 | | 8,45 | | | 10,45 | | | 12,50 | | | 14,50 | | |
| Effective anchorage depth | h_{ef} | [mm] | 31 | 44 | 35 | 43 | 52 | 43 | 60 | 68 | 50 | 67 | 80 | 58 | 79 | 92 |
| Depth of drill hole | $h_1 \geq$ | [mm] | 45 | 60 | 55 | 65 | 75 | 65 | 85 | 95 | 75 | 95 | 110 | 85 | 110 | 125 |
| Diameter of clearance hole in the fixture | $d_f \leq$ | [mm] | 8 | | 12 | | | 14 | | | 16 | | | 18 | | |
| Max. installation torque for screws with metric connection thread | $T_{inst} \leq$ | [Nm] | 10 | | 20 | | | 40 | | | 60 | | | 80 | | |
| Tangential impact screw driver ¹⁾ | $T_{imp,max}$ | [Nm] | 160 | | 300 | | | 400 | | | 650 | | | 650 | | |

¹⁾ Installation with tangential impact screw driver, with maximum power output $T_{imp,max}$ acc. to manufacturers instructions is possible

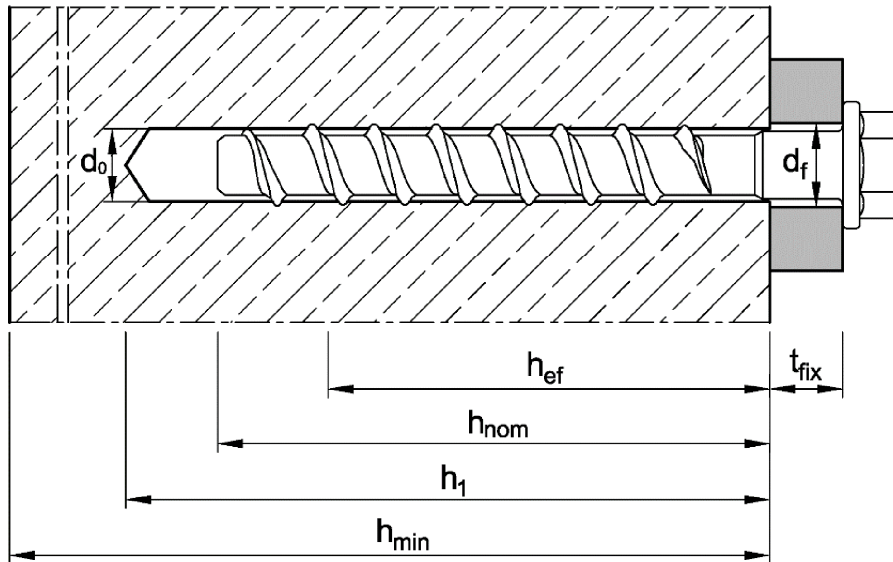


Table B2: Minimum thickness of member, minimum edge distance and minimum spacing

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | | |
|-----------------------------|-----------|------|-------|----|-------|----|-----|--------|----|-----|--------|----|-----|--------|-----|-----|-----|
| Nominal embedment depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 | |
| Minimum thickness of member | h_{min} | [mm] | 100 | | 100 | | 120 | 100 | | 130 | 120 | | 130 | 150 | 130 | 150 | 170 |
| Minimum spacing | s_{min} | [mm] | 40 | | 40 | 50 | | 50 | | | 50 | | 70 | 50 | 70 | | |
| Minimum edge distance | c_{min} | [mm] | 40 | | 40 | 50 | | 50 | | | 50 | | 70 | 50 | 70 | | |

Concrete Screw BSZ

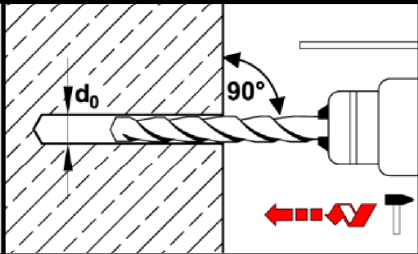
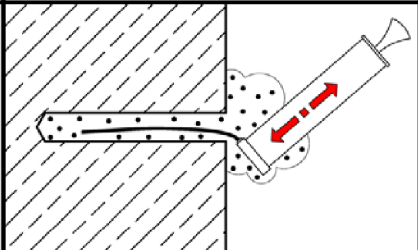
Intended use

Installation parameters / Minimum thickness of concrete member, minimum spacing and edge distance

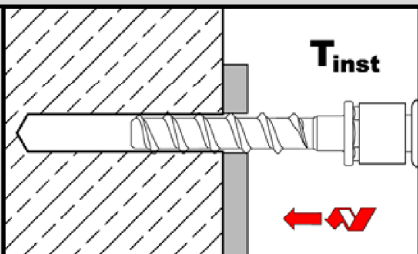
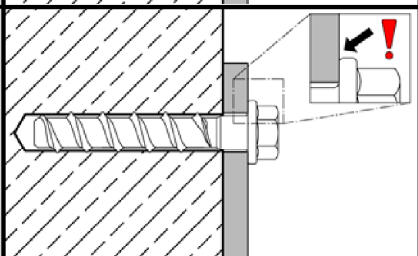
Annex B2

Installation instructions

Drill hole preparation and cleaning

| | | |
|---|---|--|
| 1 |  | Drill hole perpendicular to concrete surface. Using a suction drill, continue with step 3. |
| 2 |  | Blow out dust or alternatively vacuum clean down to the bottom of the hole. |

Installation concrete screw

| | | |
|---|--|---|
| 3 |  | Screw in, e.g. with tangential impact screw driver or torque wrench. |
| 4 |  | After installation, the head of the anchor is supported on the fixture and must be undamaged. |

Concrete Screw BSZ

Intended use
Installation instructions

Annex B3

Installation instructions - filling of annular gap

Drill hole preparation and cleaning


| | | |
|---|--|---|
| 1 | | <p>Drill hole perpendicular to concrete surface. Using a suction drill, continue with step 3.</p> |
| 2 | | <p>Blow out dust or alternatively vacuum clean down to the bottom of the hole.</p> |

Installation concrete screw with filling washer


| | | |
|---|--|---|
| 3 | | <p>Fit the filling washer to the concrete screw. The thickness of the filling washer must be taken into account with t_{fix}.</p> |
| 4 | | <p>Screw in, e.g. with tangential impact screw driver or torque wrench.</p> |
| 6 | | <p>Fill the annular gap between concrete screw and fixture with mortar (compressive strength $\geq 40 \text{ N/mm}^2$, e.g. Injection mortar VMH, VMZ or VMU plus). Use enclosed reducing adapter. Observe the processing information of the mortar! The annular gap is completely filled, when excess mortar seeps out.</p> |

For seismic loading, the application with and without filling of annular gap is permitted (Annex C3-C4).

Filling washer and reducing adapter for filling the annular gap between concrete screw and fixture



thickness of filling washer
 $t = 5 \text{ mm}$



Concrete Screw BSZ

Intended use

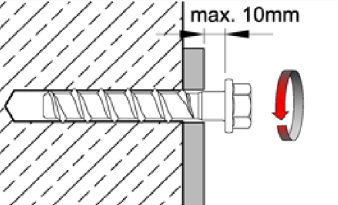
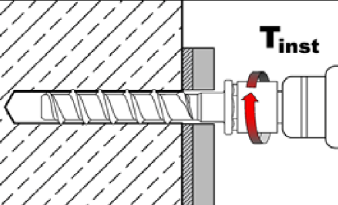
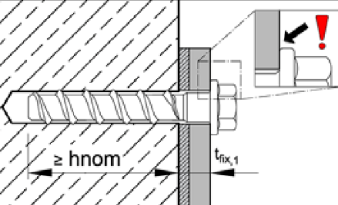
Installation instructions with filling of annular gap

Annex B4

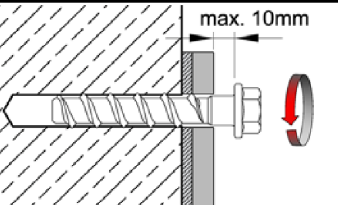
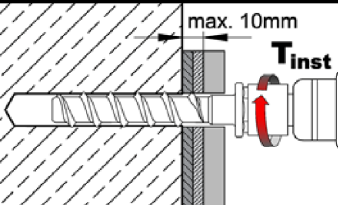
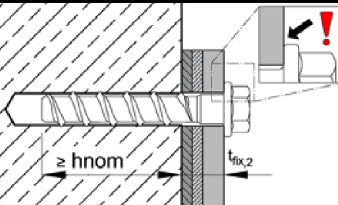
Installation instructions - Adjustment

Drill hole preparation and cleaning see Annex B3, Picture 1 and 2

1. Adjustment

| | | |
|---|---|--|
| 3 |  | Screw may be untightened maximum 10mm. |
| 4 |  | After adjustment, screw in the concrete screw with with tangential impact screw driver or torque wrench. |
| 5 |  | After installation, the head of the anchor is supported on the fixture must be undamaged. |

2. Adjustment

| | | |
|---|---|--|
| 6 |  | Screw may be untightened maximum 10mm. |
| 7 |  | After adjustment, screw in the concrete screw with with tangential impact screw driver or torque wrench. |
| 8 |  | After installation, the head of the anchor is supported on the fixture and must be undamaged. |

- adjustment is only permitted for fixings with concrete screws size BSZ 8 - BSZ 14 under static or quasi-static load.
- the fastener may be adjusted max. 2x. The fastener must not be screwed back by more than 10mm in each case. The relining carried out during adjustment must not exceed 10 mm in total. Nominal embedment depth h_{nom} must still be maintained after the adjustment.

Concrete Screw BSZ

Intended use
Installation instructions - Adjustment

Annex B5

Table C1: Characteristic values for static or quasi-static loads

| Anchor size | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | | | | | |
|--|---------------------|--|------|-------|-----|------|--------|------|-------------------|--------|-------------------|------|--------|-------------------|-----|------|----|-----|--|
| Nominal embedment depth | h_{nom} [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 | | | | |
| Installation factor | γ_{inst} [-] | 1,0 | | | | | | | | | | | | | | | | | |
| Tension load | | | | | | | | | | | | | | | | | | | |
| Steel failure | | | | | | | | | | | | | | | | | | | |
| Characteristic resistance | $N_{RK,s}$ [kN] | 14 | | 27 | | | 45 | | | 67 | | | 94 | | | | | | |
| Partial factor | $\gamma_{Ms,N}$ [-] | 1,5 | | | | | | | | | | | | | | | | | |
| Pull-out | | | | | | | | | | | | | | | | | | | |
| Characteristic resistance in concrete C20/25 | cracked | $N_{RK,p}$ [kN] | 2,0 | 4,0 | 5,0 | 9,0 | 12 | 9,0 | $\geq N_{RK,c}^0$ | 12 | $\geq N_{RK,c}^0$ | | | $\geq N_{RK,c}^0$ | | | | | |
| | uncracked | $N_{RK,p}$ [kN] | 4,0 | 9,0 | 7,5 | 12 | 16 | 12 | 20 | 26 | | | | | | | 16 | | |
| Increasing factor for $N_{RK,p}$ | Ψ_C [-] | $\left(\frac{f_{ck}}{20}\right)^{0,5}$ | | | | | | | | | | | | | | | | | |
| Concrete cone failure | | | | | | | | | | | | | | | | | | | |
| Effective anchorage depth | h_{ef} [mm] | 31 | 44 | 35 | 43 | 52 | 43 | 60 | 68 | 50 | 67 | 80 | 58 | 79 | 92 | | | | |
| Spacing | $s_{cr,N}$ [mm] | $3 h_{ef}$ | | | | | | | | | | | | | | | | | |
| Edge distance | $c_{cr,N}$ [mm] | $1,5 h_{ef}$ | | | | | | | | | | | | | | | | | |
| Factor k_1 | cracked | $k_{cr,N}$ [-] | 7,7 | | | | | | | | | | | | | | | | |
| | uncracked | $k_{ucr,N}$ [-] | 11,0 | | | | | | | | | | | | | | | | |
| Splitting | | | | | | | | | | | | | | | | | | | |
| Spacing | $s_{cr,sp}$ [mm] | 120 | 160 | 120 | 140 | 150 | 140 | 180 | 210 | 150 | 210 | 240 | 180 | 240 | 280 | | | | |
| Edge distance | $c_{cr,sp}$ [mm] | 60 | 80 | 60 | 70 | 75 | 70 | 90 | 105 | 75 | 105 | 120 | 90 | 120 | 140 | | | | |
| Shear load | | | | | | | | | | | | | | | | | | | |
| Steel failure without lever arm | | | | | | | | | | | | | | | | | | | |
| Characteristic resistance | $V_{RK,s}^0$ [kN] | 7,0 | | 13,5 | | 17,0 | | 22,5 | | 34,0 | | 33,5 | | 42,0 | | 56,0 | | | |
| Partial factor | $\gamma_{Ms,V}$ [-] | 1,25 | | | | | | | | | | | | | | | | | |
| Ductility factor | k_7 [-] | 0,8 | | | | | | | | | | | | | | | | | |
| Steel failure with lever arm | | | | | | | | | | | | | | | | | | | |
| Characteristic bending resistance | $M_{RK,s}^0$ [Nm] | 10,9 | | 26 | | | 56 | | | 113 | | | 185 | | | | | | |
| Concrete pry-out failure | | | | | | | | | | | | | | | | | | | |
| Pry-out factor | k_8 [-] | 1,0 | | 1,0 | | | 1,0 | | | 2,0 | | 1,0 | | 2,0 | | 1,0 | | 2,0 | |
| Concrete edge failure | | | | | | | | | | | | | | | | | | | |
| Effective length of anchor | $l_f = h_{ef}$ [mm] | 31 | 44 | 35 | 43 | 52 | 43 | 60 | 68 | 50 | 67 | 80 | 58 | 79 | 92 | | | | |
| Outside diameter of anchor | d_{nom} [mm] | 6 | | 8 | | | 10 | | | 12 | | | 14 | | | | | | |

Concrete Screw BSZ
Performance

 Characteristic values for **static** or **quasi-static** loads

Annex C1

Table C2: Characteristic resistance for **seismic loading**, performance category **C1**

| Anchor size | | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 |
|---|-----------------|------|--------------|-------------------|--------|--------|
| Nominal embedment depth | h_{nom} | [mm] | 65 | 85 | 100 | 115 |
| Installation factor | γ_{inst} | [-] | 1,0 | | | |
| Tension load | | | | | | |
| Steel failure | | | | | | |
| Characteristic resistance | $N_{Rk,s,eq}$ | [kN] | 27 | 45 | 67 | 94 |
| Partial factor | γ_{Ms} | [-] | 1,5 | | | |
| Pull-out | | | | | | |
| Characteristic resistance | $N_{Rk,p,eq}$ | [kN] | 12 | $\geq N_{Rk,c}^0$ | | |
| Concrete cone failure | | | | | | |
| Effective anchorage depth | h_{ef} | [mm] | 52 | 68 | 80 | 92 |
| Spacing | $s_{cr,N}$ | [mm] | 3 h_{ef} | | | |
| Edge distance | $c_{cr,N}$ | [mm] | 1,5 h_{ef} | | | |
| Shear load | | | | | | |
| Steel failure <u>without</u> lever arm | | | | | | |
| Characteristic resistance | $V_{Rk,s,eq}$ | [kN] | 8,5 | 15,3 | 21,0 | 22,4 |
| Partial factor | γ_{Ms} | [-] | 1,25 | | | |
| Concrete pry-out failure | | | | | | |
| Pry-out factor | k_8 | [-] | 1,0 | 2,0 | | |
| Concrete edge failure | | | | | | |
| Effective length of anchor | $l_f = h_{ef}$ | [mm] | 52 | 68 | 80 | 92 |
| Outside diameter of anchor | d_{nom} | [mm] | 8 | 10 | 12 | 14 |
| Factor for <u>with</u> filling of annular gap | α_{gap} | [-] | 1,0 | | | |
| annular gap <u>without</u> filling of annular gap | α_{gap} | [-] | 0,5 | | | |

Concrete Screw BSZ

Performance

Characteristic resistance for **seismic loading**, performance category **C1**

Annex C2

Table C3: Characteristic resistance for seismic loading, performance category C2, with filling of annular gap, concrete screw BSZ zinc plated

| Anchor size | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 |
|--|---------------------|--------------|--------|--------|--------|
| Nominal embedment depth | h_{nom} [mm] | 65 | 85 | 100 | 115 |
| Installation factor | γ_{inst} [-] | 1,0 | | | |
| Tension load | | | | | |
| Steel failure | | | | | |
| Characteristic resistance | $N_{Rk,s,eq}$ [kN] | 27 | 45 | 67 | 94 |
| Partial factor | γ_{Ms} [-] | 1,5 | | | |
| Pull-out | | | | | |
| Characteristic resistance | $N_{Rk,p,eq}$ [kN] | 2,4 | 5,4 | 7,1 | 10,5 |
| Concrete cone failure | | | | | |
| Effective anchorage depth | h_{ef} [mm] | 52 | 68 | 80 | 92 |
| Spacing | $s_{cr,N}$ [mm] | 3 h_{ef} | | | |
| Edge distance | $c_{cr,N}$ [mm] | 1,5 h_{ef} | | | |
| Shear load | | | | | |
| Steel failure without lever arm | | | | | |
| Characteristic resistance | $V_{Rk,s,eq}$ [kN] | 9,9 | 18,5 | 31,6 | 40,7 |
| Partial factor | γ_{Ms} [-] | 1,25 | | | |
| Concrete pry-out failure | | | | | |
| Pry-out factor | k_8 [-] | 2,0 | | | |
| Concrete edge failure | | | | | |
| Effective length of anchor | $l_f = h_{ef}$ [mm] | 52 | 68 | 80 | 92 |
| Outside diameter of anchor | d_{nom} [mm] | 8 | 10 | 12 | 14 |
| Factor for annular gap with filling of annular gap | α_{gap} [-] | 1,0 | | | |

Concrete Screw BSZ

Performance
 Characteristic resistance for seismic loading, performance category C2
 with filling of annular gap

Annex C3

Table C4: Characteristic resistance for **seismic loading**, performance category **C2**, **without filling of annular gap**, concrete screw BSZ zinc plated

| Anchor size | | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 | |
|--|---------------------------|---------------|--------------|--------|--------|--------|------|
| Nominal embedment depth | h_{nom} | [mm] | 65 | 85 | 100 | 115 | |
| Installation factor | γ_{inst} | [-] | 1,0 | | | | |
| Tension loads | | | | | | | |
| hexagon drive | Steel failure | | | | | | |
| | Characteristic resistance | $N_{Rk,s,eq}$ | [kN] | 27 | 45 | 67 | 94 |
| | Partial factor | γ_{Ms} | [-] | 1,5 | | | |
| | Pull-out | | | | | | |
| | Characteristic resistance | $N_{Rk,p,eq}$ | [kN] | 2,4 | 5,4 | 7,1 | 10,5 |
| countersunk version | Steel failure | | | | | | |
| | Characteristic resistance | $N_{Rk,s,eq}$ | [kN] | 27 | 45 | - | - |
| | Partial factor | γ_{Ms} | [-] | 1,5 | | - | - |
| | Pull-out | | | | | | |
| | Characteristic resistance | $N_{Rk,p,eq}$ | [kN] | 2,4 | 5,4 | - | - |
| Concrete cone failure | | | | | | | |
| Effective anchorage depth | h_{ef} | [mm] | 52 | 68 | 80 | 92 | |
| Spacing | $s_{cr,N}$ | [mm] | 3 h_{ef} | | | | |
| Edge distance | $c_{cr,N}$ | [mm] | 1,5 h_{ef} | | | | |
| Shear loads | | | | | | | |
| Steel failure <u>without</u> lever arm | | | | | | | |
| hexagon drive | Characteristic resistance | $V_{Rk,s,eq}$ | [kN] | 10,3 | 21,9 | 24,4 | 23,3 |
| | Partial factor | γ_{Ms} | [-] | 1,25 | | | |
| counter- sunk version | Characteristic resistance | $V_{Rk,s,eq}$ | [kN] | 3,6 | 13,7 | - | - |
| | Partial factor | γ_{Ms} | [-] | 1,25 | | - | - |
| Concrete pry-out failure | | | | | | | |
| Pry-out factor | k_8 | [-] | 2,0 | | | | |
| Concrete edge failure | | | | | | | |
| Effective length of anchor | $l_f = h_{ef}$ | [mm] | 52 | 68 | 80 | 92 | |
| Outside diameter of anchor | d_{nom} | [mm] | 8 | 10 | 12 | 14 | |
| Factor for annular gap without filling of annular gap | α_{gap} | [-] | 0,5 | | | | |

Concrete Screw BSZ

Performance
 Characteristic resistance for **seismic loading**, performance category **C2**
without filling of annular gap

Annex C4

Table C5: Characteristic values of resistance under fire exposure

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | |
|--|-------------|-------------------------------------|------------|-----|-------|-----|----|--------|----|------|--------|------|-----|--------|-----|-----|
| Nominal anchorage depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 |
| Steel failure (tension and shear resistance) | | | | | | | | | | | | | | | | |
| Characteristic resistance | R30 | $N_{RK,s,fi}$ = $V_{RK,s,fi}$ | [kN] | 0,9 | | 2,4 | | 4,4 | | 7,3 | | 10,3 | | | | |
| | R60 | | | 0,8 | | 1,7 | | 3,3 | | 5,8 | | 8,2 | | | | |
| | R90 | | | 0,6 | | 1,1 | | 2,3 | | 4,2 | | 5,9 | | | | |
| | R120 | | | 0,4 | | 0,7 | | 1,7 | | 3,4 | | 4,8 | | | | |
| Steel failure <u>with</u> lever arm | | | | | | | | | | | | | | | | |
| Characteristic bending resistance | R30 | $M^0_{RK,s,fi}$ | [Nm] | 0,7 | | 2,4 | | 5,9 | | 12,3 | | 20,4 | | | | |
| | R60 | | | 0,6 | | 1,8 | | 4,5 | | 9,7 | | 15,9 | | | | |
| | R90 | | | 0,5 | | 1,2 | | 3,0 | | 7,0 | | 11,6 | | | | |
| | R120 | | | 0,3 | | 0,9 | | 2,3 | | 5,7 | | 9,4 | | | | |
| Edge distance | $c_{cr,fi}$ | [mm] | 2 h_{ef} | | | | | | | | | | | | | |
| In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm | | | | | | | | | | | | | | | | |
| Spacing | $s_{cr,fi}$ | [mm] | 4 h_{ef} | | | | | | | | | | | | | |
| The characteristic resistance for pull-out, concrete cone failure, concrete pry-out and concrete edge failure shall be calculated according to EN 1992-4:2018. | | | | | | | | | | | | | | | | |
| The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given values | | | | | | | | | | | | | | | | |

Concrete Screw BSZ

Performance
Characteristic values of resistance under **fire exposure**

Annex C5

Table C6: Displacements under static or quasi-static loads

| Anchor size | | | BSZ 6 | | BSZ 8 | | | BSZ 10 | | | BSZ 12 | | | BSZ 14 | | |
|-------------------------|-------------------------|-------------------------|-------|-----|-------|-----|-----|--------|-----|------|--------|------|------|--------|------|------|
| Nominal embedment depth | h_{nom} | [mm] | 40 | 55 | 45 | 55 | 65 | 55 | 75 | 85 | 65 | 85 | 100 | 75 | 100 | 115 |
| Tension load | | | | | | | | | | | | | | | | |
| cracked concrete | Tension load | N [kN] | 0,95 | 1,9 | 2,4 | 4,3 | 5,7 | 4,3 | 7,9 | 9,6 | 5,7 | 9,4 | 12,3 | 7,6 | 12,0 | 15,1 |
| | Displacement | δ_{N0} [mm] | 0,3 | 0,6 | 0,6 | 0,7 | 0,8 | 0,6 | 0,5 | 0,9 | 0,9 | 0,5 | 1,0 | 0,5 | 0,8 | 0,7 |
| | | $\delta_{N\infty}$ [mm] | 0,4 | 0,4 | 0,6 | 1,0 | 0,9 | 0,4 | 1,2 | 1,2 | 1,0 | 1,2 | 1,2 | 0,9 | 1,2 | 1,0 |
| uncracked concrete | Tension load | N [kN] | 1,9 | 4,3 | 3,6 | 5,7 | 7,6 | 5,7 | 9,5 | 11,9 | 7,6 | 13,2 | 17,2 | 10,6 | 16,9 | 21,2 |
| | Displacement | δ_{N0} [mm] | 0,4 | 0,6 | 0,7 | 0,9 | 0,5 | 0,7 | 1,1 | 1,0 | 1,0 | 1,1 | 1,2 | 0,9 | 1,2 | 0,8 |
| | | $\delta_{N\infty}$ [mm] | 0,4 | 0,4 | 0,6 | 1,0 | 0,9 | 0,4 | 1,2 | 1,2 | 1,0 | 1,2 | 1,2 | 0,9 | 1,2 | 1,0 |
| Shear load | | | | | | | | | | | | | | | | |
| | Shear load | V [kN] | 3,3 | | 8,6 | | | 16,2 | | | 20,0 | | | 30,5 | | |
| Displacement | δ_{V0} [mm] | | 1,55 | | 2,7 | | | 2,7 | | | 4,0 | | | 3,1 | | |
| | $\delta_{V\infty}$ [mm] | | 3,1 | | 4,1 | | | 4,3 | | | 6,0 | | | 4,7 | | |

Concrete Screw BSZ

Performance
Displacements under static or quasi-static loads

Annex C6

Table C7: Displacements under **seismic loading**, performance category **C2**
with filling of annular gap, concrete screw BSZ zinc plated

| Anchor size | | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 |
|-------------------------|----------------------|------|-------|--------|--------|--------|
| Nominal embedment depth | h_{nom} | [mm] | 65 | 85 | 100 | 115 |
| Tension load | | | | | | |
| Displacement DLS | $\delta_{N,eq(DLS)}$ | [mm] | 0,66 | 0,32 | 0,57 | 1,16 |
| Displacement ULS | $\delta_{N,eq(ULS)}$ | [mm] | 1,74 | 1,36 | 2,36 | 4,39 |
| Shear load | | | | | | |
| Displacement DLS | $\delta_{V,eq(DLS)}$ | [mm] | 1,68 | 2,91 | 1,88 | 2,42 |
| Displacement ULS | $\delta_{V,eq(ULS)}$ | [mm] | 5,19 | 6,72 | 5,37 | 9,27 |

Table C8: Displacements under **seismic loading**, performance category **C2**
without filling of annular gap, concrete screw BSZ zinc plated

| Anchor size | | | BSZ 8 | BSZ 10 | BSZ 12 | BSZ 14 |
|--|----------------------|------|-------|--------|--------|--------|
| Nominal embedment depth | h_{nom} | [mm] | 65 | 85 | 100 | 115 |
| Tension load | | | | | | |
| Type with hexagon drive | | | | | | |
| Displacement DLS | $\delta_{N,eq(DLS)}$ | [mm] | 0,66 | 0,32 | 0,57 | 1,16 |
| Displacement ULS | $\delta_{N,eq(ULS)}$ | [mm] | 1,74 | 1,36 | 2,26 | 4,39 |
| Type countersunk head | | | | | | |
| Displacement DLS | $\delta_{N,eq(DLS)}$ | [mm] | 0,66 | 0,32 | - | - |
| Displacement ULS | $\delta_{N,eq(ULS)}$ | [mm] | 1,74 | 1,36 | - | - |
| Shear load | | | | | | |
| Type hexagon drive and with clearance hole in the fixture | | | | | | |
| Displacement DLS | $\delta_{V,eq(DLS)}$ | [mm] | 4,21 | 4,71 | 4,42 | 5,60 |
| Displacement ULS | $\delta_{V,eq(ULS)}$ | [mm] | 7,13 | 8,83 | 6,95 | 12,63 |
| Type countersunk head with clearance hole in the fixture | | | | | | |
| Displacement DLS | $\delta_{V,eq(DLS)}$ | [mm] | 2,51 | 2,98 | - | - |
| Displacement ULS | $\delta_{V,eq(ULS)}$ | [mm] | 7,76 | 6,25 | - | - |

Concrete Screw BSZ

Performance
Displacements under **seismic loading**, performance category **C2**

Annex C7