

## YDEEVNEDEKLARATION

DoP Nr.: **MKT-212 - da**

- ◊ **Varetypens unikke identifikationskode:** Boltanker B
- ◊ **Tilsigtet anvendelse:** Mekanisk anker til forankring i beton, se bilag / Annex B
- ◊ **Fabrikant:** MKT Metall-Kunststoff-Technik GmbH & Co.KG  
Auf dem Immel 2  
67685 Weilerbach
- ◊ **System eller systemer til vurdering og kontrol af konstansen af ydeevnen:** 1
- ◊ **Europæisk vurderingsdokument:** EAD 330232-00-0601  
Europæisk teknisk vurdering:  
ETA-01/0013, 29.11.2018  
Teknisk vurderingsorgan:  
DIBt, Berlin  
Notificeret organ/notificerede organer:  
NB 1343 – MPA, Darmstadt


◊ **Deklareret ydeevne/deklarererde ydeevner:**

Væsentlige funktioner	Ydeevne
<b>Mekanisk modstandsdygtighed og stabilitet (BWR1)</b>	
Karakteristisk modstand under trækspænding (statiske og kvasi-statiske effekter)	Bilag/Annex C1 – C2
Karakteristisk modstand under lateral stress (statiske og kvasi-statiske effekter)	Bilag/Annex C3
Skift (statiske og kvasi-statiske effekter)	Bilag/Annex C4
Karakteristisk modstand og skift for seismiske ydeevne kategorier C1 + C2	NPD (No Performance Determined) ingen ydeevne fastlagt
<b>Brandsikring (BWR2)</b>	
Brandegenskaber	Klasse A1
Brandsikkerhed	NPD (No Performance Determined) ingen ydeevne fastlagt

Ydeevnen for den vare, der er anført ovenfor, er i overensstemmelse med den deklarerede ydeevne. Denne ydeevnedeklaration er udarbejdet i overensstemmelse med forordning (EU) nr. 305/2011 på eneansvar af den fabrikant, der er anført ovenfor.

Underskrevet for fabrikanten og på dennes vegne af:

  
**Stefan Weustenhagen**  
(CEO)  
Weilerbach, 29.11.2018

p.p.   
**Dipl.-Ing. Detlef Bigalke**  
(Leder af produktudvikling)



Originalen af denne erklæringserklæring blev skrevet på tysk. I tilfælde af afvigelser i oversættelsen er den tyske udgave gyldig.

## Specifications of intended use

Wedge Anchor B		M6	M8	M10	M12	M16	M20
Materials	electroplated	✓	✓	✓	✓	✓	✓
	Steel zinc plated	-	✓	✓	✓	✓	✓
	hot-dip galvanized						
	sherardized	✓	✓	✓	✓	✓	✓
Stainless steel		A4	✓	✓	✓	✓	✓
High corrosion resistant steel		HCR	✓	✓	✓	✓	✓
Static or quasi-static action					✓		
Reduced anchorage depth					✓		
Uncracked concrete					✓		

### Base materials:

- Compacted, reinforced or unreinforced normal weight concrete (without fibers) acc. to EN 206:2013
- Strength classes C20/25 to C50/60 according to EN 206:2013

### Use conditions (Environmental conditions):

Structures subject to dry internal conditions	zinc plated steel, stainless steel A4, high corrosion resistant steel HCR
Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist	stainless steel A4, high corrosion resistant steel HCR
Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist <sup>1)</sup>	high corrosion resistant steel HCR

<sup>1)</sup> Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed according to EN 1992-4:2018 or TR 055

### Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application.
- Anchor installation such that the effective anchorage depth is complied with. This compliance is ensured, if the thickness of fixture is not greater than the maximum thickness of fixture marked on the anchor in accordance with Annex A1 and A2 and the hexagon nut is placed at the end of the conical bolt as delivered by the manufacturer.


## Wedge Anchor B

Intended use  
Specifications

Annex B1

**Table B1: Installation parameters, steel zinc plated**

Anchor size	M6	M8	M10	M12	M16	M20
Nominal drill hole diameter $d_0 \leq [\text{mm}]$	6	8	10	12	16	20
Cutting diameter of drill bit $d_{\text{cut}} \leq [\text{mm}]$	6,40	8,45	10,45	12,5	16,5	20,55
Installation torque (electroplated) $T_{\text{inst}} = [\text{Nm}]$	8	15	30	50	100	200
Installation torque (hot-dip galvanized) $T_{\text{inst}} = [\text{Nm}]$	-	15	30	40	90	120
Installation torque (sherardized) $T_{\text{inst}} = [\text{Nm}]$	5	15	30	40	90	120
Diameter of clearance hole in the fixture $d_f \leq [\text{mm}]$	7	9	12	14	18	22
<b>Standard anchorage depth</b>						
Depth of drill hole $h_1 \geq [\text{mm}]$	55	65	70	90	110	130
Embedment depth $h_{\text{nom}} \geq [\text{mm}]$	49	56	62	82	102	121
Effective anchorage depth $h_{\text{ef}} \geq [\text{mm}]$	40	44	48	65	82	100
<b>Reduced anchorage depth</b>						
Depth of drill hole $h_{1,\text{red}} \geq [\text{mm}]$	45	55	65	75	95	110
Embedment depth $h_{\text{nom},\text{red}} \geq [\text{mm}]$	39	47	56	67	84	99
Effective anchorage depth $h_{\text{ef},\text{red}} \geq [\text{mm}]$	30	35	42	50	64	78

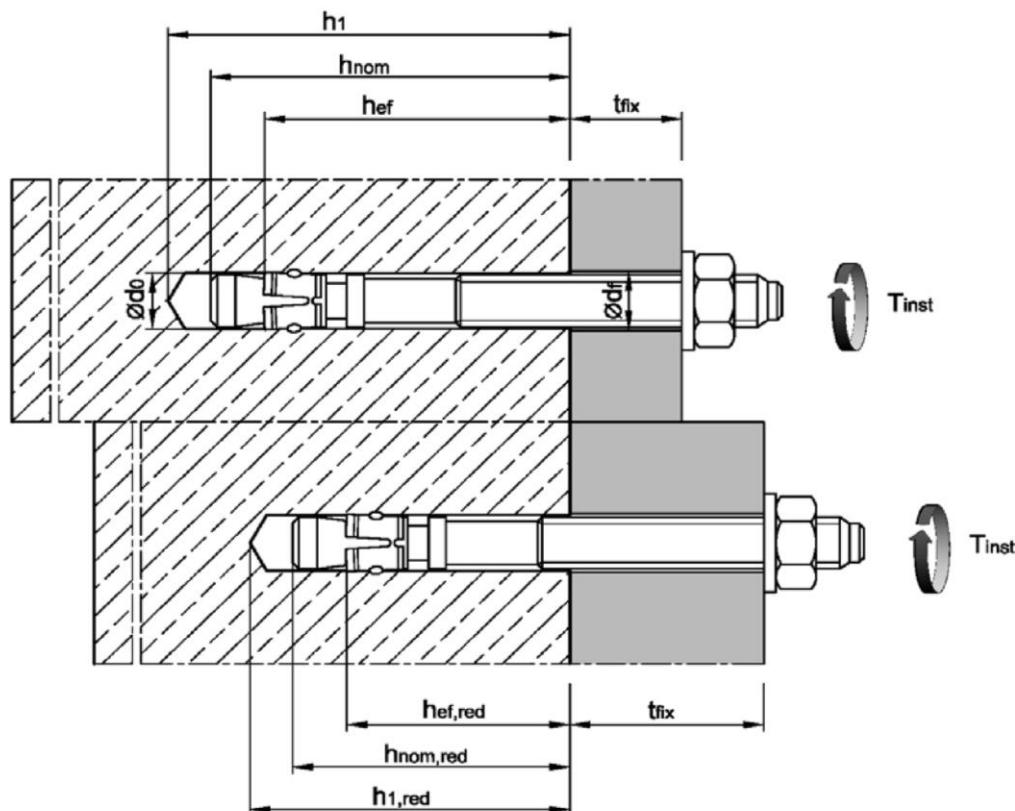


### Wedge Anchor B

**Intended use**  
Installation data, steel zinc plated

**Annex B2**

**Table B2: Installation parameters, stainless steel A4 / HCR**

Anchor size		M6	M8	M10	M12	M16	M20
Nominal drill hole diameter	$d_0 =$ [mm]	6	8	10	12	16	20
Cutting diameter of drill bit	$d_{cut} \leq$ [mm]	6,40	8,45	10,45	12,5	16,5	20,55
Installation torque	$T_{inst} =$ [Nm]	6	15	25	50	100	160
Diameter of clearance hole in the fixture	$d_f \leq$ [mm]	7	9	12	14	18	22
<b>Standard anchorage depth</b>							
Depth of drill hole	$h_1 \geq$ [mm]	55	65	70	90	110	130
Embedment depth	$h_{nom} \geq$ [mm]	49	56	62	81	99	121
Effective anchorage depth	$h_{ef} \geq$ [mm]	40	44	48	65	80	100
<b>Reduced anchorage depth</b>							
Depth of drill hole	$h_{1,red} \geq$ [mm]	45	55	65	75	95	110
Embedment depth	$h_{nom,red} \geq$ [mm]	39	47	56	66	83	99
Effective anchorage depth	$h_{ef,red} \geq$ [mm]	30	35	42	50	64	78

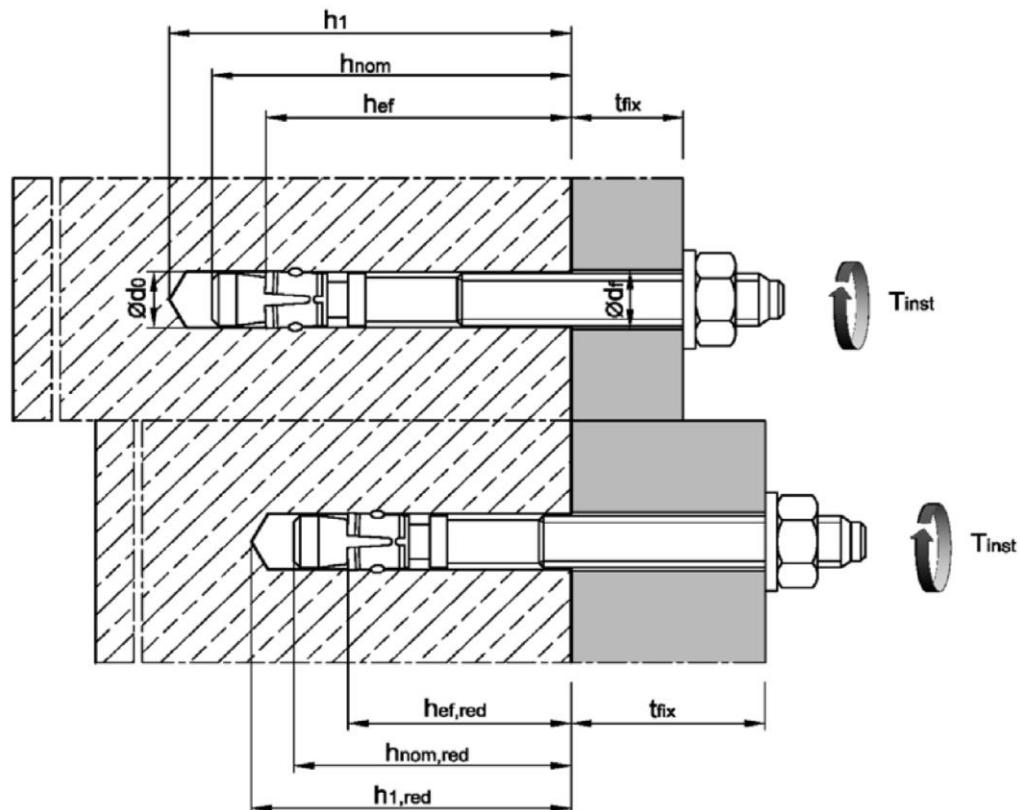

### Wedge Anchor B

**Intended use**  
Installation data, stainless steel A4/HCR

**Annex B3**

**Table B3: Minimum spacings and edge distances, steel zinc plated**

Anchor size	M6	M8	M10	M12	M16	M20	
<b>Standard anchorage depth <math>h_{ef}</math></b>							
Minimum member thickness	$h_{min}$ [mm]	100	100	100	130	170	200
Minimum spacing	$s_{min}$ [mm]	35	40	55	75	90	105
Minimum edge distance	$c_{min}$ [mm]	40	45	65	90	105	125
<b>Reduced anchorage depth <math>h_{ef,red}</math></b>							
Minimum member thickness	$h_{min}$ [mm]	80	80	100	100	130	160
Minimum spacing	$s_{min}$ [mm]	35	40	55	100	100	140
Minimum edge distance	$c_{min}$ [mm]	40	45	65	100	100	140

**Table B4: Minimum spacings and edge distances, stainless steel A4 / HCR**

Anchor size	M6	M8	M10	M12	M16	M20	
<b>Standard anchorage depth <math>h_{ef}</math></b>							
Minimum member thickness	$h_{min}$ [mm]	100	100	100	130	160	200
Minimum spacing	$s_{min}$ [mm]	35	35	45	60	80	100
	for $c \geq$ [mm]	40	65	70	100	120	150
Minimum edge distance	$c_{min}$ [mm]	35	45	55	70	80	100
	for $s \geq$ [mm]	60	110	80	100	140	180
<b>Reduced anchorage depth <math>h_{ef,red}</math></b>							
Minimum member thickness	$h_{min}$ [mm]	80	80	100	100	130	160
Minimum spacing	$s_{min}$ [mm]	35	60	55	100	110	140
Minimum edge distance	$c_{min}$ [mm]	40	60	65	100	110	140


Intermediate values by linear interpolation.

**Wedge Anchor B****Intended use**


Minimum spacings and edge distances

**Annex B4**


## Installation instructions

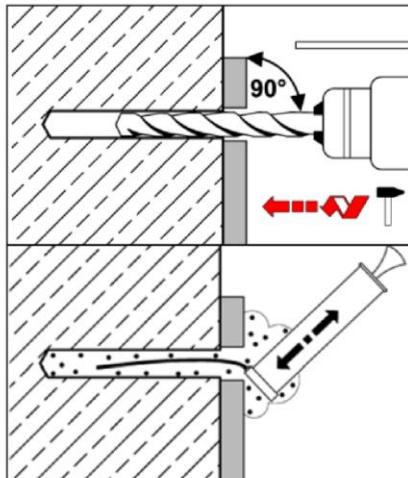


Drill hole perpendicular to concrete surface, positioning of the drill holes without damaging the reinforcement.

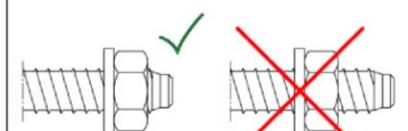


Blow out dust.

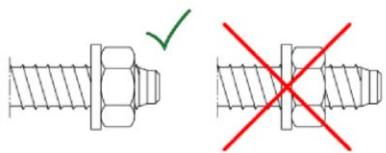

Check position of nut.

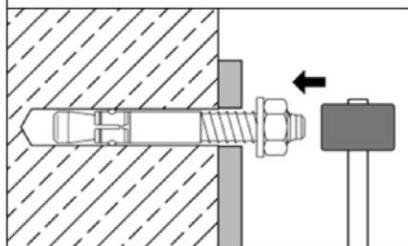

Drive in anchor, such that  $h_{ef}$  or  $h_{ef,red}$  is met. This is ensured, if the thickness of fixture is not greater than the maximum thickness of fixture marked on the anchor in accordance with Annex A2 and A3.

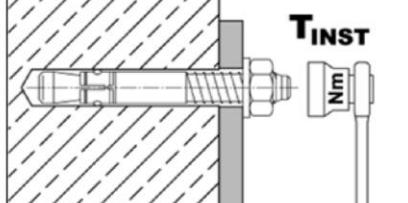

Apply installation torque  $T_{inst}$  as specified in Table B2.

## Wedge Anchor B

**Intended use**  
Installation instructions

**Annex B5**

**Table C1: Characteristic values for tension loads, steel zinc plated**

Anchor size		M6	M8	M10	M12	M16	M20					
Installation factor	$\gamma_{\text{inst}}$	[-]		1,0								
<b>Steel failure</b>												
Characteristic resistance	$N_{Rk,s}$	[kN]	8,7	15,3	26	35	65					
Partial factor	$\gamma_{Ms}$	[-]	1,5			1,6						
<b>Pull-out</b>												
<b>Standard anchorage depth <math>h_{\text{ef}}</math></b>												
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	9	12	16	1)	1)					
<b>Reduced anchorage depth <math>h_{\text{ef,red}}</math></b>												
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	6 <sup>2)</sup>	1) 2)	1)	1)	1)					
Increasing factor for $N_{Rk,p}$	$\psi_c$	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$									
<b>Splitting</b>												
Characteristic resistance in uncracked concrete C20/25	$N^0_{Rk,sp}$	[kN]	min [ $N_{Rk,p}$ ; $N^0_{Rk,c}$ ]									
<b>Standard anchorage depth <math>h_{\text{ef}}</math></b>												
Spacing	$s_{\text{cr,sp}}$	[mm]	160	220	240	330	410					
Edge distance	$c_{\text{cr,sp}}$	[mm]	80	110	120	165	205					
<b>Reduced anchorage depth <math>h_{\text{ef,red}}</math></b>												
Spacing	$s_{\text{cr,sp}}$	[mm]	180	210	230	240	320					
Edge distance	$c_{\text{cr,sp}}$	[mm]	90	105	115	120	160					
<b>Concrete cone failure</b>												
<b>Standard anchorage depth <math>h_{\text{ef}}</math></b>												
Effective anchorage depth	$h_{\text{ef}} \geq$	[mm]	40	44	48	65	82					
Spacing	$s_{\text{cr,N}}$	[mm]	3 $h_{\text{ef}}$									
Edge distance	$c_{\text{cr,N}}$	[mm]	1,5 $h_{\text{ef}}$									
<b>Reduced anchorage depth <math>h_{\text{ef,red}}</math></b>												
Effective anchorage depth	$h_{\text{ef,red}} \geq$	[mm]	30 <sup>2)</sup>	35 <sup>2)</sup>	42	50	64					
Spacing	$s_{\text{cr,N}}$	[mm]	3 $h_{\text{ef,red}}$									
Edge distance	$c_{\text{cr,N}}$	[mm]	1,5 $h_{\text{ef,red}}$									
Factor for $k_1$	$k_{\text{ucr,N}}$	[-]	11,0									

<sup>1)</sup> Pullout failure is not decisive

<sup>2)</sup> Use restricted to anchorages of indeterminate structural components

## Wedge Anchor B

### Performance

Characteristic values for tension loads, steel zinc plated

### Annex C1

**Table C2: Characteristic values for tension loads, stainless steel A4 / HCR**

Anchor size		M6	M8	M10	M12	M16	M20					
Installation factor	$\gamma_{\text{inst}}$	[-]		1,0								
<b>Steel failure</b>												
Characteristic resistance	$N_{Rk,s}$	[kN]	10	18	30	44	88					
Partial factor	$\gamma_{Ms}$	[ - ]	1,50			1,68						
<b>Pull-out</b>												
<b>Standard anchorage depth <math>h_{\text{ef}}</math></b>												
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	7,5	12	16	25	1)					
<b>Reduced anchorage depth <math>h_{\text{ef,red}}</math></b>												
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	6 <sup>2)</sup>	9 <sup>2)</sup>	12	1)	1)					
<b>Splitting</b>												
<b>Standard anchorage depth <math>h_{\text{ef}}</math></b>												
The higher one of the decisive resistances of Case 1 and Case 2 is applicable.												
Case 1												
Characteristic resistance in uncracked concrete C20/25	$N^0_{Rk,sp}$	[kN]	6	9	12	20	30					
Spacing	$s_{\text{cr,sp}}$	[mm]	3 $h_{\text{ef}}$									
Edge distance	$c_{\text{cr,sp}}$	[mm]	1,5 $h_{\text{ef}}$									
Case 2												
Characteristic resistance in uncracked concrete C20/25	$N^0_{Rk,sp}$	[kN]	7,5	12	16	25	1)					
Spacing	$s_{\text{cr,sp}}$	[mm]	160	220	240	340	410					
Edge distance	$c_{\text{cr,sp}}$	[mm]	80	110	120	170	205					
<b>Reduced anchorage depth <math>h_{\text{ef,red}}</math></b>												
Characteristic resistance in uncracked concrete C20/25	$N^0_{Rk,sp}$	[kN]	6 <sup>2)</sup>	9 <sup>2)</sup>	12	1)	1)					
Spacing	$s_{\text{cr,sp}}$	[mm]	180	210	230	300	320					
Edge distance	$c_{\text{cr,sp}}$	[mm]	90	105	115	150	160					
Increasing factor for $N_{Rk,p}$ and $N^0_{Rk,sp}$	$\psi_c$	[ - ]	$\left(\frac{f_{ck}}{20}\right)^{0,5}$									
<b>Concrete cone failure</b>												
<b>Standard anchorage depth <math>h_{\text{ef}}</math></b>												
Effective anchorage depth	$h_{\text{ef}}$	[mm]	40	44	48	65	80					
Spacing	$s_{\text{cr,N}}$	[mm]	3 $h_{\text{ef}}$									
Edge distance	$c_{\text{cr,N}}$	[mm]	1,5 $h_{\text{ef}}$									
<b>Reduced anchorage depth <math>h_{\text{ef,red}}</math></b>												
Effective anchorage depth	$h_{\text{ef,red}}$	[mm]	30 <sup>2)</sup>	35 <sup>2)</sup>	42	50	64					
Spacing	$s_{\text{cr,N}}$	[mm]	3 $h_{\text{ef}}$									
Edge distance	$c_{\text{cr,N}}$	[mm]	1,5 $h_{\text{ef}}$									
Factor for $k_1$	$k_{\text{ucr,N}}$	[ - ]	11,0									

<sup>1)</sup> Pullout failure is not decisive.

<sup>2)</sup> Use restricted to anchorages of indeterminate structural components.

### Wedge Anchor B

#### Performance

Characteristic values for tension loads, stainless steel A4 / HCR

#### Annex C2

**Table C3:** Characteristic values for shear loads, steel zinc plated

Anchor size		M6	M8	M10	M12	M16	M20
Installation factor	$\gamma_{inst}$	[ $-$ ]				1,0	
<b>Steel failure without lever arm</b>							
Characteristic resistance	$V^0_{Rk,s}$	[kN]	5	11	17	25	44
Ductility factor	$k_7$	[ $-$ ]				1,0	
<b>Steel failure with lever arm</b>							
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	9	23	45	78	186
Partial factor for $V^0_{Rk,s}$ and $M^0_{Rk,s}$	$\gamma_{Ms}$	[ $-$ ]			1,25		1,33
<b>Concrete pry-out failure</b>							
Factor for $h_{ef}$	$k_8$	[ $-$ ]	1,0	1,0	1,0	2,0	2,0
Factor for $h_{ef,red}$	$k_8$	[ $-$ ]	1,0 <sup>1)</sup>	1,0 <sup>1)</sup>	1,0	1,0	2,0
<b>Concrete edge failure</b>							
Effective length of anchor in shear loading for $h_{ef}$	$l_f$	[mm]	40	44	48	65	82
Effective length of anchor in shear loading for $h_{ef,red}$	$l_f$	[mm]	30 <sup>1)</sup>	35 <sup>1)</sup>	42	50	64
Outside diameter of anchor	$d_{nom}$	[mm]	6	8	10	12	16
1) Use restricted to anchorages of indeterminate structural components							

**Table C4:** Characteristic values for shear loads, stainless steel A4/HCR

Anchor Size		M6	M8	M10	M12	M16	M20
Installation factor	$\gamma_{inst}$	[ $-$ ]				1,0	
<b>Steel failure without lever arm</b>							
Characteristic resistance	$V^0_{Rk,s}$	[kN]	7	12	19	27	50
Ductility factor	$k_7$	[ $-$ ]				1,0	
<b>Steel failure with lever arm</b>							
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	10	24	49	85	199
Partial factor for $V^0_{Rk,s}$ and $M^0_{Rk,s}$	$\gamma_{Ms}$	[ $-$ ]			1,25		1,4
<b>Concrete pry-out failure</b>							
Factor for $h_{ef}$	$k_8$	[ $-$ ]	1,0	1,0	1,0	2,0	2,0
Factor for $h_{ef,red}$	$k_8$	[ $-$ ]	1,0 <sup>1)</sup>	1,0 <sup>1)</sup>	1,0	1,0	2,0
<b>Concrete edge failure</b>							
Effective length of anchor in shear loading with $h_{ef}$	$l_f$	[mm]	40	44	48	65	80
Effective length of anchor in shear loading with $h_{ef,red}$	$l_f$	[mm]	30 <sup>1)</sup>	35 <sup>1)</sup>	42	50	64
Outside diameter of anchor	$d_{nom}$	[mm]	6	8	10	12	16

1)  
Use restricted to anchorages of indeterminate structural components**Wedge Anchor B**

**Performance**  
 Characteristic values for shear loads

**Annex C3**

**Table C5:** Displacements under **tension loads, steel zinc plated**

Anchor size	M6	M8	M10	M12	M16	M20		
<b>Standard anchorage depth</b>								
Tension load	N	[kN]	4,3	5,8	7,6	11,9	16,7	23,8
Displacement	$\delta_{N0}$	[mm]	0,4		0,5			
	$\delta_{N\infty}$	[mm]	0,7		2,3			
<b>Reduced anchorage depth</b>								
Tension load	N	[kN]	2,9	5,0	6,5	8,5	12,3	16,6
Displacement	$\delta_{N0}$	[mm]	0,3		0,4			
	$\delta_{N\infty}$	[mm]	0,6		1,8			

**Table C6:** Displacements under **tension loads, stainless steel A4/HCR**

Anchor size	M6	M8	M10	M12	M16	M20		
<b>Standard anchorage depth</b>								
Tension load	N	[kN]	3,6	5,7	7,6	11,9	17,2	24,0
Displacement	$\delta_{N0}$	[mm]	0,7	0,9	0,5	0,6	0,9	2,1
	$\delta_{N\infty}$	[mm]		1,8			4,2	
<b>Reduced anchorage depth</b>								
Tension load	N	[kN]	2,9	4,3	5,7	8,5	12,3	16,6
Displacement	$\delta_{N0}$	[mm]	0,4	0,7	0,4	0,4	0,6	1,5
	$\delta_{N\infty}$	[mm]		1,3			2,9	

**Table C7:** Displacements under **shear loads, steel zinc plated**

Anchor size	M6	M8	M10	M12	M16	M20		
Shear load	V	[kN]	2,9	6,3	9,7	14,3	23,6	37,0
Displacement	$\delta_{V0}$	[mm]	1,2	1,5	1,6	2,6	3,1	4,4
	$\delta_{V\infty}$	[mm]	2,4	2,2	2,4	3,9	4,6	6,6

**Table C8:** Displacements under **shear loads, stainless steel A4/HCR**

Anchor Size	M6	M8	M10	M12	M16	M20		
Shear load	V	[kN]	4,0	6,9	10,9	15,4	28,6	43,7
Displacement	$\delta_{V0}$	[mm]	1,1	2,0	1,2	2,0	2,2	2,1
	$\delta_{V\infty}$	[mm]	1,7	3,0	1,8	3,0	3,3	3,2

**Wedge Anchor B**Performance  
Displacements**Annex C4**