


**DECLARAȚIA DE PERFORMANȚĂ**DoP Nr.: **MKT-2.2-200\_ro**

- ◇ **Cod unic de identificare al produsului-tip:** **Sistemul de injecție VM-EA**
- ◇ **Utilizare (utilizări) preconizată (preconizate):** Sistem de injectare pentru ancorarea în zidărie, a se vedea anexa / Annex B
- ◇ **Fabricant:** MKT Metall-Kunststoff-Technik GmbH & Co.KG  
Auf dem Immel 2  
67685 Weilerbach
- ◇ **Sistem sau sisteme de evaluare și verificare a constanței performanței:** 1
- ◇ **Documentul de evaluare european:** **ETAG 029**  
Evaluarea tehnică europeană: **ETA-17/0006, 05.01.2017**  
Organismul de evaluare tehnică: **TZÚS, Prag**  
Organism (organisme) notificat(e): **NB 2873 – Technische Universität Darmstadt**
- ◇ **Performanța (performanțe) declarată (declarate):**

Caracteristici esențiale	Performanță
<b>Rezistență mecanică și stabilitate (BWR 1)</b>	
Factor de reducere pentru testele pe șantier (factorul $\beta$ )	Anexa / Annex C1
Capacitate portantă caracteristică (sarcini la întindere și forfecare)	Anexa / Annex C5 – C39
Capacitate de încărcare caracteristică pentru momentele de încovoiere	Anexa / Annex C2
Schimbări (sarcini la întindere și forfecare)	Anexa / Annex C5 – C38
Distanțe de margine și centru	Anexa / Annex C4 – C38
<b>Securitatea la incendiu (BWR 2)</b>	
Comportamentul la foc	Clasa A1
Rezistență la foc	Nu sa determinat performanța

Performanța produsului de mai sus este performanța / performanța declarată. Producătorul de mai sus este singurul responsabil de întocmirea declarației de performanță în conformitate cu Regulamentul (EU) nr. 305/2011.

Semnată pentru și în numele fabricantului de către:

  
**Stefan Weustenhagen**  
(Director general)  
**Weilerbach, 01.01.2021**

p.p.   
**Dipl.-Ing. Detlef Bigalke**  
(Sef de dezvoltare a produselor)



Originalul acestei declarații de performanță a fost scris în limba germană. În cazul abaterilor în traducere, versiunea germană este validă.

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads

### Base materials

- Autoclaved Aerated Concrete (Use category d) to Annex B2.
- Solid brick masonry (Use category b), according to Annex B2 to B4.
- Hollow brick masonry (Use category c), according to Annex B2 to B4.
- Mortar strength class of the masonry M2,5 at minimum according to EN 998-2:2010.
- For other bricks in solid masonry and in hollow or perforated masonry, the characteristic resistance of the anchor may be determined by job site tests according to ETAG 029, Annex B under consideration of the  $\beta$ -factor to Annex C1, Table C1.

Note: The characteristic resistances are also valid for larger brick sizes and larger compressive strength of the masonry unit.

### Temperature range:

- T<sub>a</sub>: -40°C to +40°C (max. short. term temperature +40°C and max. long term temperature +24°C)
- T<sub>b</sub>: -40°C to +80°C (max. short. term temperature +80°C and max. long term temperature +50°C)

### Use conditions (Environmental conditions)

- Dry and wet structures (regarding injection mortar).
- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Use categories in respect of installation and use:

- Category d/d: Installation and use in dry masonry
- Category w/d: Installation in wet masonry, use in dry masonry
- Category w/w: Installation and use in wet masonry

### Design:

- Verifiable calculation notes and drawings are prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings.
- The anchorage are designed in accordance with the ETAG 029, Annex C, Design method A under the responsibility of an engineer experienced in anchorages and masonry work.

### Installation:







- Dry or wet structures
- Anchor Installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

**Injection System VM-EA, VM-EA express, VM-EA low speed  
for masonry**







**Intended use  
Specifications**

**Annex B 1**

**Table B1: Overview brick types and properties with corresponding fastening elements (Anchors and Sleeves)**

Brick-Nr.	Brick type	picture	Brick size Length x width x height	Compressive strength	Bulk density	Sleeve - Anchor type	Annex
			[mm]	[N/mm <sup>2</sup> ]	[kg/dm <sup>3</sup> ]		
<b>Autoclaved aerated concrete units according EN 771-4</b>							
1	Autoclaved Aerated Concrete AAC2		599 x 375 x 249	2	0,35	M8 / M10 / M12 / M16	C4 / C5
2	Autoclaved Aerated Concrete AAC4		499 x 375 x 249	4	0,5	M8 / M10 / M12 / M16	C6 / C7
3	Autoclaved Aerated Concrete AAC6		499 x 240 x 249	6	0,6	M8 / M10 / M12 / M16	C8 / C9
<b>Calcium silicate masonry units according EN 771-2</b>							
4	Calcium silicate solid brick KS-NF		240 x 115 x 71	10 20 27	2,0	M8 / M10 / M12 / M16 VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16 VM-SH 20x200 – M12 / M16	C10 / C11
5	Calcium silicate hollow brick KS L-3DF		240 x 175 x 113	8 12 14	1,4	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16 VM-SH 20x200 – M12 / M16	C12 / C13
6	Calcium silicate hollow brick KS L-12DF		498 x 175 x 238	10 12 16	1,4	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x130 – M12 / M16	C14 / C15
<b>Injection System VM-EA, VM-EA express, VM-EA low speed for masonry</b>						<b>Annex B 2</b>	
<b>Intended use</b> Brick types and properties with corresponding fastening elements							

**Table B1: Overview brick types and properties with corresponding fastening elements (Anchors and Sleeves)**







Brick-Nr.	Brick type	picture	Brick size Length x width x height	Compressive strength	Bulk density	Sleeve - Anchor type	Annex
			[mm]	[N/mm <sup>2</sup> ]	[kg/dm <sup>3</sup> ]		
<b>Clay masonry units according EN 771-1</b>							
7	Clay solid brick Mz – DF		240 x 115 x 55	10 20 28	1,64	M8 / M10 / M12 / M16 VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16 VM-SH 20x200 – M12 / M16	C16 / C17
8	Clay hollow brick HLz-16DF		497 x 240 x 238	6 9 12 14	0,83	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16 VM-SH 20x200 – M12 / M16	C18 / C19
9	Clay hollow brick Porotherm Homebric		500 x 200 x 299	6 8 10	0,68	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16	C20 / C21
10	Clay hollow brick BGV Thermo		500 x 200 x 314	4 6 10	0,62	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16	C22 / C23
11	Clay hollow brick Calibric Th		500 x 200 x 314	6 9 12	0,62	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16	C24 / C25
12	Clay hollow brick Urbanbric		560 x 200 x 274	6 9	0,74	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16	C26 / C27

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Intended use**  
Brick types and properties with corresponding fastening elements

**Annex B 3**

**Table B1: Overview brick types and properties with corresponding fastening elements (Anchors and Sleeves)**

Brick-Nr.	Brick type	picture	Brick size Length x width x height	Compressive strength	Bulk density	Sleeve - Anchor type	Annex
			[mm]	[N/mm <sup>2</sup> ]	[kg/dm <sup>3</sup> ]		
<b>Clay masonry units according EN 771-1</b>							
13	Clay hollow brick Blocchi Leggeri		250 x 120 x 250	4 6 8	0,55	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16 VM-SH 20x200 – M12 / M16	C28 / C29
14	Clay hollow brick Doppio Uni		250 x 120 x 120	10 16 20 28	0,92	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16 VM-SH 20x200 – M12 / M16	C30 / C31
<b>Light weight concrete according EN 771-3</b>							
15	Hollow light weight concrete Bloc creux B40		494 x 200 x 190	4	0,80	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16	C32 / C33
16	Solid light weight concrete		300 x 123 x 248	2	0,63	M8 / M10 / M12 / M16	C34 / C35
17	Hollow light weight Leca Lex harkko RUH-200		498 x 200 x 195	2,7	0,62	VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16	C36 / C37
18	Solid light weight Leca Lex RUH-200 Kulma		498 x 200 x 195	3	0,62	M8 / M10 / M12 / M16 VM-SH 12x80 – M8 VM-SH 16x85 – M8 / M10 VM-SH 16x130 – M8 / M10 VM-SH 16x130/330 - M8 / M10 VM-SH 20x85 – M12 / M16 VM-SH 20x130 – M12 / M16	C38 / C39

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Intended use**  
Brick types and properties with corresponding fastening elements

**Annex B 4**

## Installation: Steel brush



**Table B2: Installation parameters in Autoclaved Aerated Concrete AAC and solid masonry (without sleeve)**

Threaded rod			M8	M10	M12	M16
Nominal drill hole diameter	$d_o$	[mm]	10	12	14	18
Drill hole depth	$h_o$	[mm]	80	90	100	100
Effective anchorage depth	$h_{ef} = h_{nom}$	[mm]	80	90	100	100
Minimum wall thickness	$h_{min}$	[mm]	$h_{ef} + 30$			
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	9	12	14	18
Diameter of Steel brush	$d_b$	[mm]	12	14	16	20
Minimum diameter of Steel brush	$d_{b,min}$	[mm]	10,5	12,5	14,5	18,5
Max torque moment	$T_{inst,max}$	[Nm]	See parameters of brick Annex C4 to Annex C39			

**Table B3: Installation parameters in solid and hollow masonry (with sleeve)**

Threaded rod			M8	M8 / M10			M12 / M16		
Sleeve	[mm]		VM-SH12x80	VM-SH16x85	VM-SH16x130	VM-SH16x130/330	VM-SH20x85	VM-SH20x130	VM-SH20x200
Nominal drill hole diameter	$d_o$	[mm]	12	16	16	16	20	20	20
Drill hole depth	$h_o$	[mm]	85	90	135	$135 + t_{fix}^1$	90	135	205
Effective anchorage depth	$h_{ef} = h_{nom}$	[mm]	80	85	130	130	85	130	200
Minimum wall thickness	$h_{min}$	[mm]	115	115	175	175	115	175	240
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	9	9 (M8) / 12 (M10)			14 (M12) / 18 (M16)		
Diameter of brush	$d_b$	[mm]	14	18			22		
Minimum diameter of Steel brush	$d_{b,min}$	[mm]	12,5	16,5			20,5		
Max torque moment	$T_{inst,max}$	[Nm]	See parameters of brick Annex C4 to Annex C39						

<sup>1)</sup>  $t_{fix} < 200$  mm

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Intended use**  
Installation parameters and cleaning brush

**Annex B 5**

**Table B4: Maximum working time and minimum curing time**

Temperature in the base material	VM-EA low speed		VM-EA		VM-EA express	
	Max. working time	Min. curing time	Max. working time	Min. curing time	Max. working time	Min. curing time
-10°C to -6°C					60 min	4 h
-5°C to -1°C			90 min	6 h	45 min	2 h
0°C to +4°C			45 min	3 h	25 min	80 min
+5°C to +9°C			25 min	2 h	10 min	45 min
+10°C to +14°C	30 min	5 h	20 min	100 min	4 min	25 min
+15°C to +19°C	20 min	210 min	15 min	80 min	3 min	20 min
+20°C to +29°C	15 min	145 min	6 min	45 min	2 min	15 min
+30°C to +34°C	10 min	80 min	4 min	25 min		
+35°C to +39°C	6 min	45 min	2 min	20 min		
+40°C to +44°C	4 min	25 min				
+45°C	2 min	20 min				
Cartridge temperature	+5°C to +45°C		+5°C to +40°C		-5°C to +30°C	

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Intended use**  
Working and curing time

**Annex B 6**




## Installation instructions

### Preparation of cartridge




1. Remove the cap and attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. In case of a foil tube cartridge, cut off the clip before use. For every working interruption longer than the recommended working time (Table B4) as well as for new cartridges, a new static-mixer shall be used.






2. Prior to dispensing into the anchor hole, squeeze out separately a minimum of three full strokes, for foil tube cartridges six full strokes, and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour.


### Installation in solid masonry (without sleeve)





3. Holes to be drilled perpendicular to the surface of the base material by using a hard-metal tipped hammer drill bit. Drill a hole, with drill method according to Annex C4 – C39, into the base material, with nominal drill hole diameter and bore hole depth acc. to the size and embedment depth required by the selected anchor. In case of aborted drill hole the drill hole shall be filled with mortar.




4. Blow out from the bottom of the drill hole two times. Attach the appropriate sized brush ( $> d_{b,min}$  Table B2 or B3) to a drilling machine or a battery screwdriver, brush the hole clean two times, and finally blow out the hole again two times.




5. Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. Observe the gel-/ working times given in Table B4.




6. The position of the embedment depth shall be marked on the threaded rod. Push the threaded rod into the drill hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached. The anchor shall be free of dirt, grease, oil or other foreign material.



7. Be sure that the annular gap is fully filled with mortar. If no excess mortar is visible at the top of the hole, the application has to be renewed.



8. Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (attend Table B4).



9. After full curing, the fixture can be installed with up to the max. torque (see parameters of brick Annex C4 to Annex C38) by using a calibrated torque wrench.

Injection System VM-EA, VM-EA express, VM-EA low speed for masonry

#### Intended use


Installation instruction Solid masonry and Autoclaved Aerated Concrete

Annex B 7






## Installation instructions (continuation)


### Installation in solid and hollow masonry (with sleeve)




3. Holes to be drilled perpendicular to the surface of the base material by using a hard-metal tipped hammer drill bit. Drill a hole, with drill method according to Annex C4 – C39, into the base material, with nominal drill hole diameter and drill hole depth acc. to the size and embedment depth required by the selected anchor. In case of aborted drill hole the drill hole shall be filled with mortar.




4. Blow out from the bottom of the drill hole two times. Attach the appropriate sized brush ( $> d_{b,min}$  Table B2 or B3) to a drilling machine or a battery screwdriver, brush the hole clean two times, and finally blow out the hole again two times.




5. Insert the sleeve flush with the surface of the masonry. Only use sleeves that have the right length. Never cut the sleeve except the sleeve VM-SH 16x130/330. For installing the sleeve VM-SH 16x130/330 measure the required length of sleeve, cut the sleeve from the top and set the cap on it before pushing it through the fixing element.




6. Starting from the bottom or back fill the sleeve with adhesive. For quantity of mortar attend cartridges label or installation instructions. Observe the gel-/ working times given in Table B4.



7. The position of the embedment depth shall be marked on the threaded rod. Push the threaded rod into the drill hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached. The anchor shall be free of dirt, grease, oil or other foreign material.



8. Allow the adhesive to cure to the specified curing time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (attend Table B4).



9. After full curing, the fixture can be installed with up to the max. torque (see parameters of brick Annex C4 to Annex C38) by using a calibrated torque wrench.

Injection System VM-EA, VM-EA express, VM-EA low speed for masonry

Intended use  
Installation instructions (hollow brick) and Solid lightweight Concrete

Annex B 8

**Table C1:  $\beta$ -factors for job-site testing under tension loading**

Brick-Nr.	Installation & Use category	Anchor size	$\beta$ -factor	
			T <sub>a</sub> : 24°C / 40°C	T <sub>b</sub> : 50°C / 80°C
1-3	d/d	M8	0,82	0,70
		M10		
		M12	0,70	0,60
		M16		
	w/d w/w	M8	0,82	0,70
		M10	0,63	0,54
		M12	0,48	0,41
		M16		
4-18	d/d w/d w/w	For all anchor	0,72	0,50

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performances**  
 $\beta$ -factors for job site testing under tension load

**Annex C 1**

**Table C2: Characteristic tension, shear resistance and bending moment of threaded rod**

Size			M8	M10	M12	M16
<b>Characteristic tension resistance</b>						
steel, property class 4.6	$N_{Rk,s}$	[kN]	15	23	34	63
	$\gamma_{Ms}^{1)}$	[-]	2,0			
steel, property class 4.8	$N_{Rk,s}$	[kN]	15	23	34	63
	$\gamma_{Ms}^{1)}$	[-]	1,5			
steel, property class 5.6	$N_{Rk,s}$	[kN]	18	29	42	79
	$\gamma_{Ms}^{1)}$	[-]	2,0			
steel, property class 5.8	$N_{Rk,s}$	[kN]	18	29	42	79
	$\gamma_{Ms}^{1)}$	[-]	1,5			
steel, property class 8.8	$N_{Rk,s}$	[kN]	29	46	67	126
	$\gamma_{Ms}^{1)}$	[-]	1,5			
Stainless steel A4 / HCR, property class 70	$N_{Rk,s}$	[kN]	26	41	59	110
	$\gamma_{Ms}^{1)}$	[-]	1,87			
Stainless steel A4 / HCR, property class 80	$N_{Rk,s}$	[kN]	29	46	67	126
	$\gamma_{Ms}^{1)}$	[-]	1,6			
<b>Characteristic shear resistance</b>						
steel, property class 4.6	$V_{Rk,s}$	[kN]	7	12	17	31
	$\gamma_{Ms}^{1)}$	[-]	1,67			
steel, property class 4.8	$V_{Rk,s}$	[kN]	7	12	17	31
	$\gamma_{Ms}^{1)}$	[-]	1,25			
steel, property class 5.6	$V_{Rk,s}$	[kN]	9	15	21	39
	$\gamma_{Ms}^{1)}$	[-]	1,67			
steel, property class 5.8	$V_{Rk,s}$	[kN]	9	15	21	39
	$\gamma_{Ms}^{1)}$	[-]	1,25			
steel, property class 8.8	$V_{Rk,s}$	[kN]	15	23	34	63
	$\gamma_{Ms}^{1)}$	[-]	1,25			
Stainless steel A4 / HCR, property class 70	$V_{Rk,s}$	[kN]	13	20	30	55
	$\gamma_{Ms}^{1)}$	[-]	1,56			
Stainless steel A4 / HCR, property class 80	$V_{Rk,s}$	[kN]	15	23	34	63
	$\gamma_{Ms}^{1)}$	[-]	1,33			
<b>Characteristic bending moment</b>						
steel, property class 4.6	$M_{Rk,s}$	[Nm]	15	30	52	133
	$\gamma_{Ms}^{1)}$	[-]	1,67			
steel, property class 4.8	$M_{Rk,s}$	[Nm]	15	30	52	133
	$\gamma_{Ms}^{1)}$	[-]	1,25			
steel, property class 5.6	$M_{Rk,s}$	[Nm]	19	37	65	166
	$\gamma_{Ms}^{1)}$	[-]	1,67			
steel, property class 5.8	$M_{Rk,s}$	[Nm]	19	37	65	166
	$\gamma_{Ms}^{1)}$	[-]	1,25			
steel, property class 8.8	$M_{Rk,s}$	[Nm]	30	60	105	266
	$\gamma_{Ms}^{1)}$	[-]	1,25			
Stainless steel A4 / HCR, property class 70	$M_{Rk,s}$	[Nm]	26	52	92	232
	$\gamma_{Ms}^{1)}$	[-]	1,56			
Stainless steel A4 / HCR, property class 80	$M_{Rk,s}$	[Nm]	30	60	105	266
	$\gamma_{Ms}^{1)}$	[-]	1,33			

<sup>1)</sup> In absence of national regulations


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performances**

Characteristic tension, shear resistance and bending moment of threaded rod

**Annex C 2**

## Spacing and edge distances

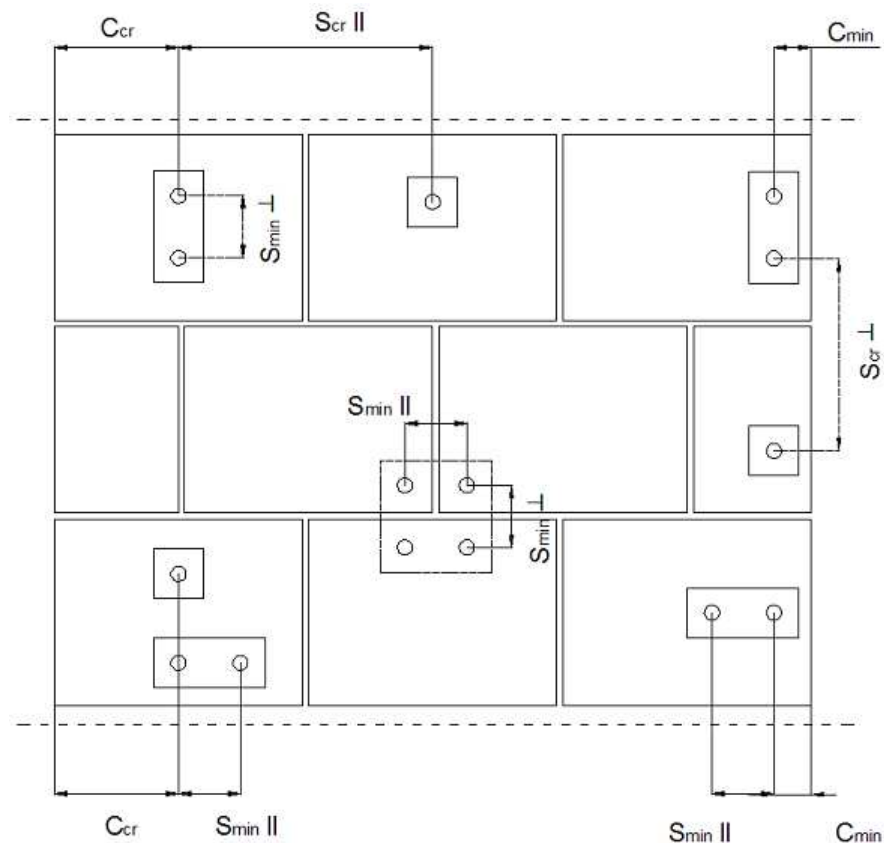

- $C_{cr}$  = Characteristic edge distance
- $S_{cr II}$  = Characteristic spacing parallel to the bed joint
- $S_{cr \perp}$  = Characteristic spacing perpendicular to the bed joint
- $C_{min}$  = Minimum edge distance
- $S_{min II}$  = Minimum spacing parallel to the bed joint
- $S_{min \perp}$  = Minimum spacing perpendicular to the bed joint


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performances**  
Edge distance and anchor spacing

**Annex C 3**

## Brick type: Autoclaved Aerated Concrete – AAC2

**Table C3: Description**

Brick type	Autoclaved Aerated Concrete AAC2	
Bulk density [kg/dm <sup>3</sup> ]	0,35	
Compressive strength [N/mm <sup>2</sup> ]	2	
Code	EN 771-4	
Producer (country code)	e.g. Ytong (CZ)	
Brick dimensions [mm]	599 x 375 x 249	
Drilling method	Rotary drilling	

**Table C4: Installation parameter (Edge and spacing distances)**

Anchor size	Effective anchorage depth	Edge distance	Spacing	Maximum installation torque
	$h_{ef}$	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel} = s_{min \perp}$	$T_{inst,max}$
		[mm]		[Nm]
<b>M8</b>	80	120	240	2
<b>M10</b>	90	135	270	
<b>M12</b>	100	150	300	
<b>M16</b>	100	150	300	

**Table C5: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,29	0,58	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,23	1,84
90		0,23	0,46		0,87	1,31
100		0,39	0,79		1,29	1,94

Injection System VM-EA, VM-EA express, VM-EA low speed for masonry

Performance Autoclaved Aerated Concrete – AAC2  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 4**

**Brick type: Autoclaved Aerated Concrete AAC2**

**Table C6: Characteristic values of resistance under tension and shear loads**

Anchor size	Effective anchorage depth	Characteristic resistance				
		Use category				
		d/d		w/d w/w		d/d w/d w/w
		40°C / 24°C	80°C / 50°C	40°C / 24°C	80°C / 50°C	For all temperature range
		$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$
[mm]	[kN]					
<b>Compressive strength <math>f_b \geq 2 \text{ N/mm}^2</math></b>						
<b>M8</b>	80	0,9	0,9	0,9	0,9	1,5
<b>M10</b>	90	0,9	0,9	0,9	0,75	2,0
<b>M12</b>	100	1,5	1,5	1,2	0,9	2,5
<b>M16</b>	100	1,5	1,5	1,2	0,9	3,5

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Autoclaved Aerated Concrete – AAC2**  
Characteristic values of resistance under tension and shear load

**Annex C 5**

## Brick type: Autoclaved Aerated Concrete AAC4

**Table C7: Description**

Brick type	Autoclaved Aerated Concrete AAC4	
Bulk density [kg/dm <sup>3</sup> ]	0,50	
Compressive strength [N/mm <sup>2</sup> ]	4	
Code	EN 771-4	
Producer (country code)	e.g. Ytong (CZ)	
Brick dimensions [mm]	499 x 375 x 249	
Drilling method	Rotary drilling	

**Table C8: Installation parameter (Edge and spacing distances)**

Anchor size	Effective anchorage depth	Edge distance	Spacing	Maximum installation torque
	$h_{ef}$	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel} = s_{min \perp}$	$T_{inst,max}$
		[mm]		[Nm]
<b>M8</b>	80	120	240	2
<b>M10</b>	90	135	270	
<b>M12</b>	100	150	300	
<b>M16</b>	100	150	300	

**Table C9: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,23	0,47	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,23	1,84
90		0,58	1,17		0,87	1,31
100		0,10	0,21		1,29	1,94

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Autoclaved Aerated Concrete – AAC4**  
Brick description, drawing,  
Installation parameters, Displacement

**Annex C 6**



**Brick type: Autoclaved Aerated Concrete AAC4**

**Table C10: Characteristic values of resistance under tension and shear loads**

Anchor size	Effective anchorage depth	Characteristic resistance				
		Use category				
		d/d		w/d w/w		d/d w/d w/w
		40°C / 24°C	80°C / 50°C	40°C / 24°C	80°C / 50°C	For all temperature range
		$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$
[mm]	[kN]					
<b>Compressive strength <math>f_b \geq 4 \text{ N/mm}^2</math></b>						
<b>M8</b>	80	0,9	0,9	0,9	0,9	1,5
<b>M10</b>	90	2,5	2,0	1,5	1,5	2,0
<b>M12</b>	100	2,5	2,0	2,0	1,5	2,5
<b>M16</b>	100	3,5	3,0	2,0	2,0	3,5

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Autoclaved Aerated Concrete – AAC4**  
Characteristic values of resistance under tension and shear load

**Annex C 7**

## Brick type: Autoclaved Aerated Concrete AAC6

**Table C11: Description**

Brick type	Autoclaved Aerated Concrete AAC6	
Bulk density [kg/dm <sup>3</sup> ]	0,60	
Compressive strength [N/mm <sup>2</sup> ]	6	
Code	EN 771-4	
Producer (country code)	e.g. Porit (DE)	
Brick dimensions [mm]	499 x 240 x 249	
Drilling method	Rotary drilling	

**Table C12: Installation parameter (Edge and spacing distances)**

Anchor size	Effective anchorage depth	Edge distance	Spacing	Maximum installation torque
	$h_{ef}$	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel} = s_{min \perp}$	$T_{inst,max}$
		[mm]		[Nm]
<b>M8</b>	80	120	240	2
<b>M10</b>	90	135	270	
<b>M12</b>	100	150	300	
<b>M16</b>	100	150	300	

**Table C13: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,54	1,09	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0,32	0,48
90		0,85	1,69		1,49	2,23
100		0,10	0,19		1,67	2,50

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Autoclaved Aerated Concrete – AAC6**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 8**

**Brick type: Autoclaved Aerated Concrete AAC6**

**Table C14: Characteristic values of resistance under tension and shear loads**

Anchor size	Effective anchorage depth	Characteristic resistance				
		Use category				
		d/d		w/d w/w		d/d w/d w/w
		40°C / 24°C	80°C / 50°C	40°C / 24°C	80°C / 50°C	For all temperature range
		$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$
[mm]	[kN]					
<b>Compressive strength <math>f_b \geq 6 \text{ N/mm}^2</math></b>						
<b>M8</b>	80	2,0	2,0	2,0	2,0	5,5
<b>M10</b>	90	3,0	2,5	2,5	2,0	9,0
<b>M12</b>	100	4,5	3,5	3,0	2,5	9,0
<b>M16</b>	100	5,5	4,5	3,5	3,0	11,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Autoclaved Aerated Concrete – AAC6**  
Characteristic values of resistance under tension and shear load

**Annex C 9**

**Brick type: Calcium silicate solid brick KS-NF**

**Table C15: Description**

Brick type	Calcium silicate solid brick KS-NF	
Bulk density [kg/dm <sup>3</sup> ]	2,0	
Compressive strength [N/mm <sup>2</sup> ]	10, 20 or 27	
Code	EN 771-2	
Producer (country code)	e.g. Wemding (DE)	
Brick dimensions [mm]	240 x 115 x 71	
Drilling method	Hammer drilling	

**Table C16: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing	Maximum installation torque
		$h_{ef}$	$C_{min} = C_{cr}$	$S_{cr} = S_{min II} = S_{min \perp}$	$T_{inst,max}$
[mm]					[Nm]
<b>M8</b>	-	80	120	240	10
<b>M10</b>	-	90	135	270	20
<b>M12 / M16</b>	-	100	150	300	
<b>M8</b>	VM-SH 12x80	80	120	240	10
	VM-SH 16x85	85	127	255	
<b>M10</b>	VM-SH 16x85	85	127	255	20
<b>M8 / M10</b>	VM-SH 16x130	130	195	390	
	VM-SH 16x130/330	130	195	390	
<b>M12 / M16</b>	VM-SH 20x85	85	127	255	
	VM-SH 20x130	130	195	390	
	VM-SH 20x200	200	300	600	

**Table C17: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,08	0,16	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	3,07	4,61
85		0,26	0,52		1,46	2,19
90		0,09	0,18		1,50	2,25
100		0,10	0,20		1,03	1,53
130 ; 200		0,22	0,44		1,16	1,74

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Calcium solid brick KS-NF**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 10**

**Brick type: Calcium silicate solid brick KS-NF**

**Table C18: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth [mm]	Characteristic resistance		
			Use category d/d; w/d; w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$
<b>Compressive strength <math>f_b \geq 10 \text{ N/mm}^2</math></b>					
<b>M8</b>	-	80	3,0	2,0	3,0
<b>M10</b>	-	90	3,0	2,0	3,0
<b>M12</b>	-	100	4,0	2,5	3,5
<b>M16</b>	-	100	3,0	2,0	3,5
<b>M8</b>	VM-SH 12x80	80	2,5	2,0	2,5
	VM-SH 16x85	85	2,5	2,0	3,0
	VM-SH16x130/VM-SH16x130/330	130	4,0	2,5	4,0
<b>M10</b>	VM-SH 16x85	85	2,5	2,0	3,0
	VM-SH16x130/330	130	4,5	3,0	4,0
<b>M12 / M16</b>	VM-SH 20x85	85	2,5	2,0	3,0
	VM-SH20x130/VM-SH20x200	130 / 200	4,5	2,5	4,0
<b>Compressive strength <math>f_b \geq 20 \text{ N/mm}^2</math></b>					
<b>M8</b>	-	80	4,5	3,0	4,5
<b>M10</b>	-	90	4,5	3,0	4,5
<b>M12</b>	-	100	5,5	3,5	5,0
<b>M16</b>	-	100	4,5	3,0	5,0
<b>M8</b>	VM-SH 12x80	80	4,0	2,5	4,0
	VM-SH 16x85	85	4,0	2,5	4,5
	VM-SH16x130/VM-SH16x130/330	130	6,0	3,5	5,5
<b>M10</b>	VM-SH 16x85	85	4,0	2,5	4,5
	VM-SH 16x130/330	130	6,0	4,0	5,5
<b>M12 / M16</b>	VM-SH 20x85	85	4,0	2,5	5,0
	VM-SH20x130/VM-SH20x200	130 / 200	6,0	4,0	5,5
<b>Compressive strength <math>f_b \geq 27 \text{ N/mm}^2</math></b>					
<b>M8</b>	-	80	5,5	3,5	5,0
<b>M10</b>	-	90	5,5	3,5	5,5
<b>M12</b>	-	100	6,5	4,5	6,0
<b>M16</b>	-	100	5,5	3,5	6,0
<b>M8</b>	VM-SH 12x80	80	4,5	3,0	4,5
	VM-SH 16x85	85	4,5	3,0	5,5
	VM-SH16x130/VM-SH16x130/330	130	6,5	4,5	6,5
<b>M10</b>	VM-SH 16x85	85	4,5	3,0	5,5
	VM-SH 16x130/330	130	6,5	4,5	6,5
<b>M12 / M16</b>	VM-SH 20x85	85	4,5	3,0	5,5
	VM-SH20x130/VM-SH20x200	130 / 200	6,5	4,5	6,5

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Calcium solid brick KS-NF**  
Characteristic values of resistance under tension and shear load

**Annex C 11**

**Brick type: Calcium silicate hollow brick KS L-3DF**

**Table C19: Description**

Brick type	Calcium silicate hollow brick KS L-3DF	
Bulk density [kg/dm <sup>3</sup> ]	1,4	
Compressive strength [N/mm <sup>2</sup> ]	8, 12 or 14	
Code	EN 771-2	
Producer (country code)	e.g. Wemding (DE)	
Brick dimensions [mm]	240 x 175 x 113	
Drilling method	Rotary drilling	

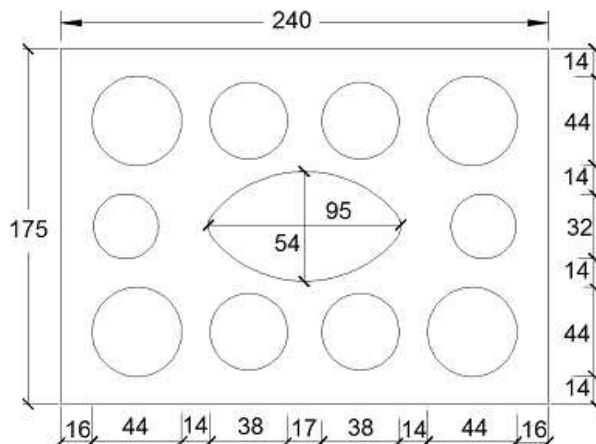

**Table C20: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
				$S_{cr} = S_{min \parallel}$	$S_{min \perp}$	
		$h_{ef}$	$C_{min} = C_{cr}$	[mm]		$T_{inst,max}$ [Nm]
<b>M8</b>	VM-SH 12x80	80	100	240	113	8
<b>M8 / M10</b>	VM-SH 16x85	85				
	VM-SH 16x130	130				
<b>M12 / M16</b>	VM-SH 16x130/330	130	120	240	113	8
	VM-SH 20x85	85				
	VM-SH 20x130	130				
	VM-SH 20x200	200				

**Table C21: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,36	0,73	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0,82	1,23
85		1,62	3,24		1,83	2,75
130 ; 200		1,70	3,40		1,98	2,98

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Calcium hollow brick KS L-3DF**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 12**

**Brick type: Calcium silicate hollow brick KS L-3DF**

**Table C22: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$ [mm]	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$		
[kN]					
<b>Compressive strength <math>f_b \geq 8 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	1,5	0,9	2,0
	VM-SH 16x85	85	1,5	0,9	2,5
	VM-SH 16x130	130	2,5	1,5	3,0
	VM-SH 16x130/330	130	2,5	1,5	3,0
<b>M10</b>	VM-SH 16x85	85	1,5	0,9	2,5
	VM-SH 16x130	130	2,5	1,5	3,0
	VM-SH 16x130/330	130	2,5	1,5	3,0
<b>M12</b>	VM-SH 20x85	85	1,5	0,9	3,0
	VM-SH 20x130/VM-SH 20x200	130 / 200	2,5	1,5	3,0
<b>M16</b>	VM-SH 20x85	85	1,5	0,9	3,0
	VM-SH 20x130/VM-SH 20x200	130 / 200	2,5	1,5	4,0
<b>Compressive strength <math>f_b \geq 12 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	2,0	1,2	2,5
	VM-SH 16x85	85	2,0	1,2	3,5
	VM-SH 16x130	130	3,5	2,0	4,5
	VM-SH 16x130/330	130	3,5	2,0	4,5
<b>M10</b>	VM-SH 16x85	85	2,0	1,2	3,5
	VM-SH 16x130	130	3,5	2,0	4,5
	VM-SH 16x130/330	130	3,5	2,0	4,5
<b>M12</b>	VM-SH 20x85	85	2,0	1,2	3,5
	VM-SH 20x130/VM-SH 20x200	130 / 200	3,5	2,0	4,5
<b>M16</b>	VM-SH 20x85	85	2,0	1,2	3,5
	VM-SH 20x130/VM-SH 20x200	130 / 200	3,5	2,0	5,0
<b>Compressive strength <math>f_b \geq 14 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	2,5	1,5	3,0
	VM-SH 16x85	85	2,5	1,5	4,0
	VM-SH 16x130	130	4,0	3,0	5,0
	VM-SH 16x130/330	130	4,0	3,0	5,0
<b>M10</b>	VM-SH 16x85	85	2,5	1,5	4,0
	VM-SH 16x130	130	4,0	3,0	5,0
	VM-SH 16x130/330	130	4,0	3,0	5,0
<b>M12</b>	VM-SH 20x85	85	2,5	1,5	4,5
	VM-SH 20x130/VM-SH 20x200	130 / 200	4,0	3,0	5,0
<b>M16</b>	VM-SH 20x85	85	2,5	1,5	4,5
	VM-SH 20x130/VM-SH 20x200	130 / 200	4,0	3,0	6,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Calcium hollow brick KS L-3DF**  
Characteristic values of resistance under tension and shear load


**Annex C 13**



**Brick type: Calcium silicate hollow brick KS L-12DF**

**Table C23: Description**

Brick type	Calcium silicate hollow brick KS L-12DF	
Bulk density [kg/dm³]	1,40	
Compressive strength [N/mm²]	10, 12 or 16	
Code	EN 771-2	
Producer (country code)	e.g. Wemding (DE)	
Brick dimensions [mm]	498 x 175 x 238	
Drilling method	Rotary drilling	

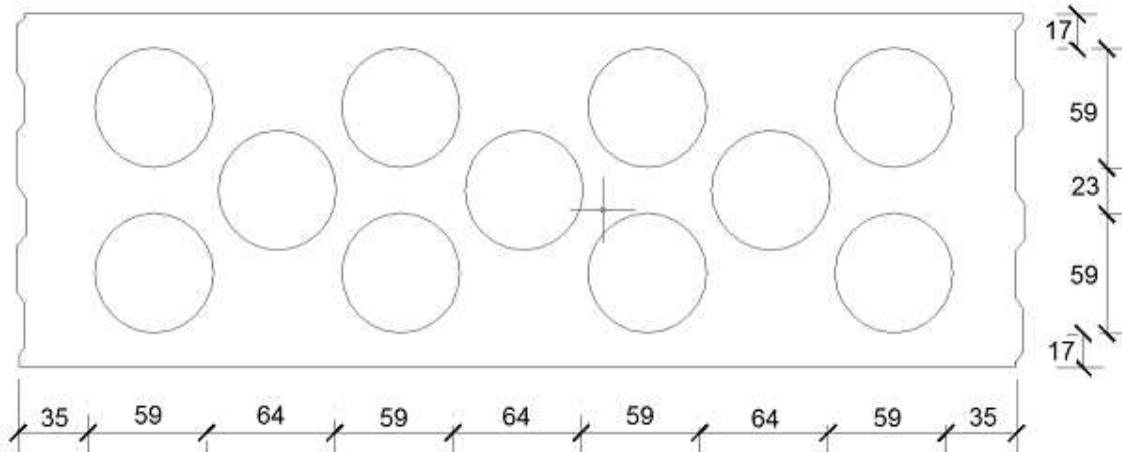

**Table C24: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		$h_{ef}$	$C_{min} = C_{cr}$	$S_{cr} = S_{min \parallel}$	$S_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
<b>M8</b>	VM-SH 12x80	80	100	498	238	2
<b>M8 / M10</b>	VM-SH 16x85	85				4
	VM-SH 16x130	130				
	VM-SH 16x130/330	130				
<b>M12 / M16</b>	VM-SH 20x85	85	120			
	VM-SH 20x130	130				

**Table C25: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,21	0,42	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,77	2,66
85		0,13	0,26		3,89	5,83
130		0,22	0,44		4,35	6,52

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Calcium hollow brick KS L-12DF**  
Brick description, drawing,  
Installation parameters, Displacement

**Annex C 14**

**Brick type: Calcium silicate hollow brick KS L-12DF**

**Table C26: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d	w/d	w/w
			40°C / 24°C	80°C / 50°C	For all temperature range
h <sub>ef</sub>	N <sub>Rk</sub> <sup>1)</sup>	N <sub>Rk</sub> <sup>1)</sup>	V <sub>Rk,b</sub> <sup>2)</sup>		
[mm]	[kN]				
<b>Compressive strength f<sub>b</sub> ≥ 10 N/mm<sup>2</sup></b>					
<b>M8</b>	VM-SH 12x80	80	0,4	0,3	3,0
	VM-SH 16x85	85	1,2	0,9	6,0
	VM-SH 16x130	130	3,5	2,5	7,0
	VM-SH 16x130/330	130	3,5	2,5	7,0
<b>M10</b>	VM-SH 16x85	85	1,2	0,9	6,0
	VM-SH 16x130	130	3,5	2,5	7,0
	VM-SH 16x130/330	130	3,5	2,5	7,0
<b>M12 / M16</b>	VM-SH 20x85	85	1,2	0,9	6,0
	VM-SH 20x130/VM-SH 20x200	130 / 200	3,5	2,5	7,0
<b>Compressive strength f<sub>b</sub> ≥ 12 N/mm<sup>2</sup></b>					
<b>M8</b>	VM-SH 12x80	80	0,4	0,3	3,5
	VM-SH 16x85	85	1,5	0,9	7,0
	VM-SH 16x130	130	4,5	3,0	8,0
	VM-SH 16x130/330	130	4,5	3,0	8,0
<b>M10</b>	VM-SH 16x85	85	1,5	0,9	7,0
	VM-SH 16x130	130	4,5	3,0	8,0
	VM-SH 16x130/330	130	4,5	3,0	8,0
<b>M12 / M16</b>	VM-SH 20x85	85	1,5	0,9	7,0
	VM-SH 20x130/VM-SH 20x200	130 / 200	4,5	3,0	8,0
<b>Compressive strength f<sub>b</sub> ≥ 16 N/mm<sup>2</sup></b>					
<b>M8</b>	VM-SH 12x80	80	0,5	0,4	4,0
	VM-SH 16x85	85	2,0	1,2	9,0
	VM-SH 16x130	130	5,5	3,5	10,0
	VM-SH 16x130/330	130	5,5	3,5	10,0
<b>M10</b>	VM-SH 16x85	85	2,0	1,2	9,0
	VM-SH 16x130	130	5,5	3,5	10,0
	VM-SH 16x130/330	130	5,5	3,5	10,0
<b>M12 / M16</b>	VM-SH 20x85	85	2,0	1,2	8,5
	VM-SH 20x130/VM-SH 20x200	130 / 200	5,5	3,5	10,0

<sup>1)</sup> For design according ETAG 029, Annex C: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see ETAG 029, Annex C

<sup>2)</sup> For V<sub>Rk,s</sub> see Annex C 2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Calcium hollow brick KS L-12DF**  
Characteristic values of resistance under tension and shear load

**Annex C 15**

## Brick type: Clay solid brick Mz-DF

### Table C27: Description

Brick type	Clay solid brick Mz-DF	
Bulk density [kg/dm³]	1,64	
Compressive strength [N/mm²]	10, 20 or 28	
Code	EN 771-1	
Producer (country code)	e.g. Unipor (DE)	
Brick dimensions [mm]	240 x 115 x 55	
Drilling method	Hammer drilling	

### Table C28: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing	Maximum installation torque
		$h_{ef}$	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel} = s_{min \perp}$	$T_{inst,max}$
		[mm]			[Nm]
<b>M8</b>	-	80	120	240	6
	VM-SH 12x80	80	120	240	
	VM-SH 16x85	85	127	255	
<b>M10</b>	-	90	135	270	10
<b>M12 / M16</b>	-	100	150	300	
<b>M10</b>	VM-SH 16x85	85	127	255	8
	VM-SH 16x130	130	195	390	
	VM-SH 16x130/330	130	195	390	
<b>M12 / M16</b>	VM-SH 20x85	85	127	255	
	VM-SH 20x130	130	195	390	
	VM-SH 20x200	200	300	600	

### Table C29: Displacement

Effective anchorage depth $h_{ef}$	<b>N</b>	$\delta_{N0}$	$\delta_{N\infty}$	<b>V</b>	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,12	0,24	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	2,27	3,41
85		0,13	0,26		1,22	1,83
90		0,06	0,13		0,71	1,06
100		0,18	0,35		0,43	0,64
130 ; 200		0,42	0,85		1,22	1,83

Injection System VM-EA, VM-EA express, VM-EA low speed for masonry

Performance Clay solid brick Mz-DF  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 16**

**Brick type: Clay solid brick Mz-DF**

**Table C30: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d;	w/d;	w/w
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$		
[mm]	[kN]				
<b>Compressive strength <math>f_b \geq 10 \text{ N/mm}^2</math></b>					
<b>M8</b>	-	80	1,5	1,2	3,0
<b>M10</b>	-	90	1,5	1,2	3,5
<b>M12</b>	-	100	1,5	0,9	5,0
<b>M16</b>	-	100	2,5	1,5	5,0
<b>M8</b>	VM-SH 12x80	80	2,0	1,5	3,0
	VM-SH 16x85	85	2,0	1,5	3,0
	VM-SH 16x130 / VM-SH 16x130/330	130	3,0	2,0	3,0
<b>M10</b>	VM-SH 16x85	85	2,0	1,5	3,5
	VM-SH 16x130 / VM-SH 16x130/330	130	3,0	2,0	3,5
<b>M12 / M16</b>	VM-SH 20x85	85	2,0	1,5	3,5
	VM-SH 20x130 / VM-SH 20x200	130 / 200	3,0	2,0	3,5
<b>Compressive strength <math>f_b \geq 20 \text{ N/mm}^2</math></b>					
<b>M8</b>	-	80	2,5	1,5	4,5
<b>M10</b>	-	90	2,5	1,5	5,5
<b>M12</b>	-	100	2,0	1,5	7,5
<b>M16</b>	-	100	3,5	2,5	7,5
<b>M8</b>	VM-SH 12x80	80	3,0	2,0	4,0
	VM-SH 16x85	85	3,0	2,0	4,5
	VM-SH 16x130 / VM-SH 16x130/330	130	4,0	2,5	4,5
<b>M10</b>	VM-SH 16x85	85	3,0	2,0	5,0
	VM-SH 16x130 / VM-SH 16x130/330	130	4,5	3,0	5,0
<b>M12 / M16</b>	VM-SH 20x85	85	3,0	2,0	5,0
	VM-SH 20x130 / VM-SH 20x200	130 / 200	4,5	3,0	5,0
<b>Compressive strength <math>f_b \geq 28 \text{ N/mm}^2</math></b>					
<b>M8</b>	-	80	3,0	2,0	5,5
<b>M10</b>	-	90	3,0	2,0	6,5
<b>M12</b>	-	100	2,5	1,5	9,0
<b>M16</b>	-	100	4,5	3,0	9,0
<b>M8</b>	VM-SH 12x80	80	3,5	2,5	5,0
	VM-SH 16x85	85	3,5	2,5	5,0
	VM-SH 16x130 / VM-SH 16x130/330	130	5,0	3,5	5,0
<b>M10</b>	VM-SH 16x85	85	3,5	2,5	6,0
	VM-SH 16x130 / VM-SH 16x130/330	130	5,0	3,5	6,0
<b>M12 / M16</b>	VM-SH 20x85	85	3,5	2,5	6,0
	VM-SH 20x130 / VM-SH 20x200	130 / 200	5,0	3,5	6,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Clay solid brick Mz-DF**  
Characteristic values of resistance under tension and shear load

**Annex C 17**

**Brick type: Clay hollow brick HLz-16DF**

**Table C31: Description**

Brick type	Clay hollow brick HLz-16DF	
Bulk density [kg/dm³]	0,83	
Compressive strength [N/mm²]	6, 9, 12 or 14	
Code	EN 771-1	
Producer (country code)	e.g. Unipor (DE)	
Brick dimensions [mm]	497 x 238 x 240	
Drilling method	Rotary drilling	

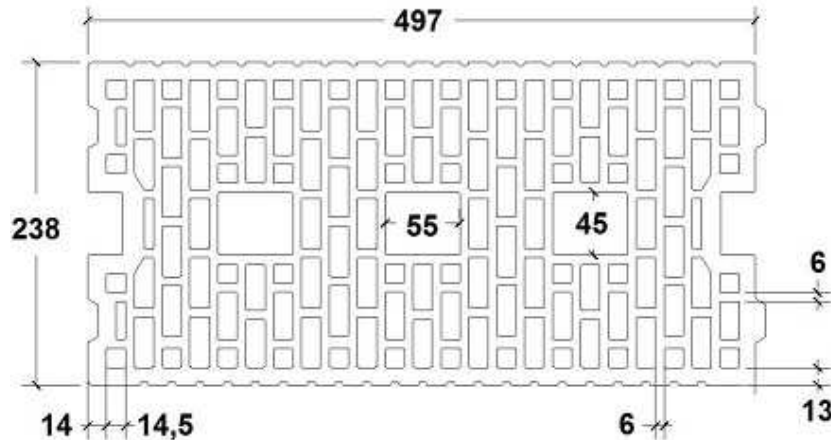

**Table C32: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth $h_{ef}$	Edge distance $C_{min} = C_{Cr}$	Spacing		Maximum installation torque $T_{inst,max}$
				$S_{Cr} = S_{min \parallel}$	$S_{min \perp}$	
				[mm]		
<b>M8</b>	VM-SH 12x80	80	100	497	238	6
<b>M8 / M10</b>	VM-SH 16x85	85				
	VM-SH 16x130	130				
	VM-SH 16x130/330	130				
<b>M12 / M16</b>	VM-SH 20x85	85	120	497	238	6
	VM-SH 20x130	130				
	VM-SH 20x200	200				

**Table C33: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,27	0,55	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,02	1,53
85		0,55	1,10		2,14	3,22
130 ; 200		0,19	0,38		2,26	3,39

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Clay hollow brick HLz-16DF**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 18**

**Brick type: Clay hollow brick HLz-16DF**

**Table C34: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d; w/d; w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
		$h_{ef}$ [mm]	$N_{Rk}^{1)}$ [kN]	$N_{Rk}^{1)}$ [kN]	$V_{Rk,b}^{2)}$ [kN]
<b>Compressive strength <math>f_b \geq 6 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	1,2	0,75	2,5
	VM-SH 16x85	85	1,5	1,2	4,0
	VM-SH 16x130	130	2,5	1,5	4,0
	VM-SH 16x130/330	130	2,5	1,5	4,0
<b>M10</b>	VM-SH 16x85	85	1,5	1,2	4,0
	VM-SH 16x130	130	2,5	1,5	6,0
	VM-SH 16x130/330	130	2,5	1,5	6,0
<b>M12 / M16</b>	VM-SH 20x85	85	2,0	1,5	4,0
	VM-SH 20x130/VM-SH 20x200	130/ 200	2,5	1,5	6,0
<b>Compressive strength <math>f_b \geq 9 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	1,2	0,9	3,0
	VM-SH 16x85	85	2,0	1,5	4,5
	VM-SH 16x130	130	3,0	2,0	5,0
	VM-SH 16x130/330	130	3,0	2,0	5,0
<b>M10</b>	VM-SH 16x85	85	2,0	1,5	5,0
	VM-SH 16x130	130	3,0	2,0	7,0
	VM-SH 16x130/330	130	3,0	2,0	7,0
<b>M12 / M16</b>	VM-SH 20x85	85	2,5	2,0	5,0
	VM-SH 20x130/VM-SH 20x200	130/ 200	3,0	2,0	7,0
<b>Compressive strength <math>f_b \geq 12 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	1,5	1,2	3,5
	VM-SH 16x85	85	2,5	1,5	5,5
	VM-SH 16x130	130	3,5	2,5	6,0
	VM-SH 16x130/330	130	3,5	2,5	6,0
<b>M10</b>	VM-SH 16x85	85	2,5	1,5	6,0
	VM-SH 16x130	130	3,5	2,5	8,0
	VM-SH 16x130/330	130	3,5	2,5	8,0
<b>M12 / M16</b>	VM-SH 20x85	85	3,5	2,0	6,0
	VM-SH 20x130/VM-SH 20x200	130/ 200	3,5	2,5	8,0
<b>Compressive strength <math>f_b \geq 14 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	1,5	1,2	4,0
	VM-SH 16x85	85	2,5	2,0	6,0
	VM-SH 16x130	130	3,5	2,5	6,5
	VM-SH 16x130/330	130	3,5	2,5	6,5
<b>M10</b>	VM-SH 16x85	85	2,5	2,0	6,0
	VM-SH 16x130	130	3,5	2,5	9,0
	VM-SH 16x130/330	130	3,5	2,5	9,0
<b>M12 / M16</b>	VM-SH 20x85	85	3,5	2,0	6,0
	VM-SH 20x130/VM-SH 20x200	130/ 200	3,5	2,5	9,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Clay hollow brick HLz-16DF**  
Characteristic values of resistance under tension and shear load

**Annex C 19**

**Brick type: Clay hollow brick Porotherm Homebric**

**Table C35: Description**

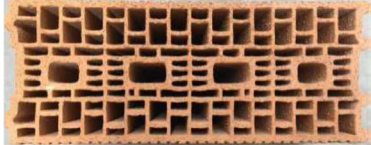Brick type	Clay hollow brick Porotherm Homebric	
Bulk density [kg/dm³]	0,68	
Compressive strength [N/mm²]	6, 8 or 10	
Code	EN 771-1	
Producer (country code)	e.g. Wienerberger (FR)	
Brick dimensions [mm]	500 x 200 x 299	
Drilling method	Rotary drilling	

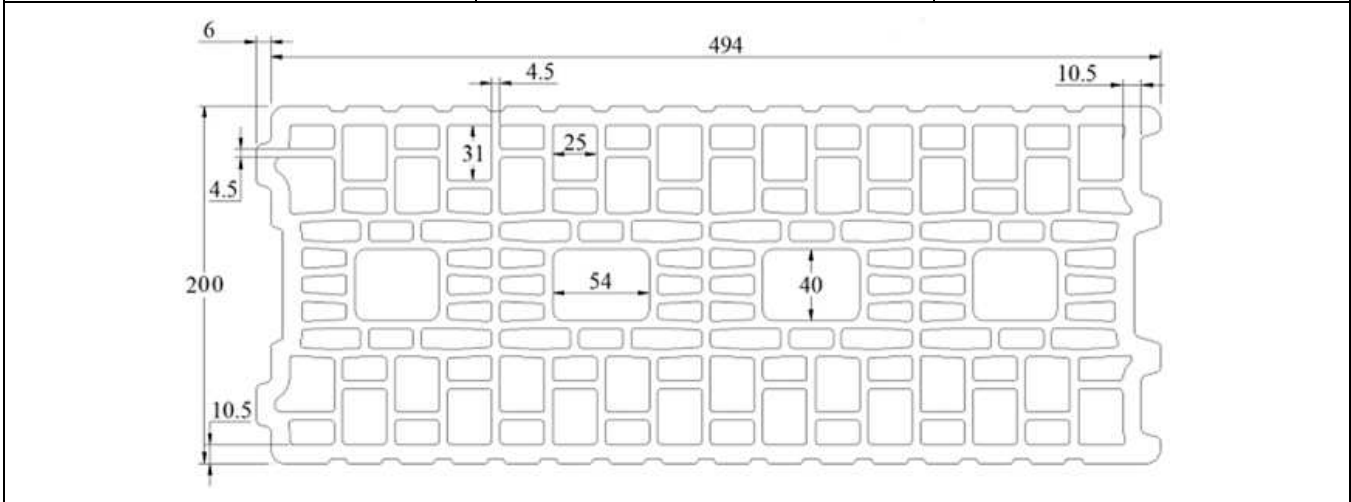

**Table C36: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
				$S_{cr} = S_{min II}$	$S_{min \perp}$	
		$h_{ef}$	$C_{min} = C_{cr}$	[mm]		$T_{inst,max}$
						[Nm]
<b>M8</b>	VM-SH 12x80	80	100	500	299	2
<b>M8 / M10</b>	VM-SH 16x85	85				6
	VM-SH 16x130	130				
	VM-SH 16x130/330	130				
<b>M12 / M16</b>	VM-SH 20x85	85	120	500	299	6
	VM-SH 20x130	130				

**Table C37: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,65	1,29	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,26	1,89
85		0,52	1,04		1,89	2,84
130		0,45	0,90		1,48	2,23

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Clay hollow brick Porotherm Homebric**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 20**



Brick type: Clay hollow brick Porotherm Homebric

Table C38: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$ [mm]	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$	[kN]	
<b>Compressive strength <math>f_b \geq 6 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,9	0,75	2,0
	VM-SH 16x85	85	1,2	0,75	2,0
	VM-SH 16x130	130	1,5	0,9	2,5
	VM-SH 16x130/330	130	1,5	0,9	2,5
<b>M10</b>	VM-SH 16x85	85	1,2	0,75	2,0
	VM-SH 16x130	130	1,5	0,9	2,5
	VM-SH 16x130/330	130	1,5	0,9	2,5
<b>M12</b>	VM-SH 20x85	85	1,2	0,75	3,0
	VM-SH 20x130	130	1,5	0,9	3,0
<b>M16</b>	VM-SH 20x85	85	1,2	0,75	3,0
	VM-SH 20x130	130	1,5	0,9	3,0
<b>Compressive strength <math>f_b \geq 8 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	1,2	0,9	2,5
	VM-SH 16x85	85	1,2	0,9	2,5
	VM-SH 16x130	130	1,5	1,2	3,0
	VM-SH 16x130/330	130	1,5	1,2	3,0
<b>M10</b>	VM-SH 16x85	85	1,2	0,9	2,5
	VM-SH 16x130	130	1,5	1,2	3,0
	VM-SH 16x130/330	130	1,5	1,2	3,0
<b>M12</b>	VM-SH 20x85	85	1,2	0,9	3,5
	VM-SH 20x130	130	1,5	1,2	3,5
<b>M16</b>	VM-SH 20x85	85	1,2	0,9	3,5
	VM-SH 20x130	130	1,5	1,2	3,5
<b>Compressive strength <math>f_b \geq 10 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	1,2	0,9	3,0
	VM-SH 16x85	85	1,5	0,9	3,0
	VM-SH 16x130	130	2,0	1,2	3,5
	VM-SH 16x130/330	130	2,0	1,2	3,5
<b>M10</b>	VM-SH 16x85	85	1,5	0,9	3,0
	VM-SH 16x130	130	2,0	1,2	3,5
	VM-SH 16x130/330	130	2,0	1,2	3,5
<b>M12</b>	VM-SH 20x85	85	1,5	0,9	4,0
	VM-SH 20x130	130	2,0	1,2	4,0
<b>M16</b>	VM-SH 20x85	85	1,5	0,9	4,0
	VM-SH 20x130	130	2,0	1,2	4,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


Injection System VM-EA, VM-EA express, VM-EA low speed for masonry


Performance Clay hollow brick Porotherm Homebric  
Characteristic values of resistance under tension and shear load

Annex C 21

**Brick type: Clay hollow brick BGV Thermo**

**Table C39: Description**

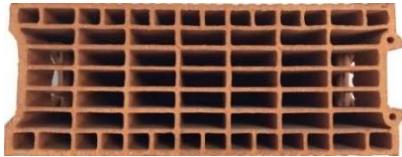Brick type	Clay hollow brick BGV Thermo	
Bulk density [kg/dm <sup>3</sup> ]	0,62	
Compressive strength [N/mm <sup>2</sup> ]	4, 6 or 10	
Code	EN 771-1	
Producer (country code)	e.g. Leroux (FR)	
Brick dimensions [mm]	500 x 200 x 314	
Drilling method	Rotary drilling	

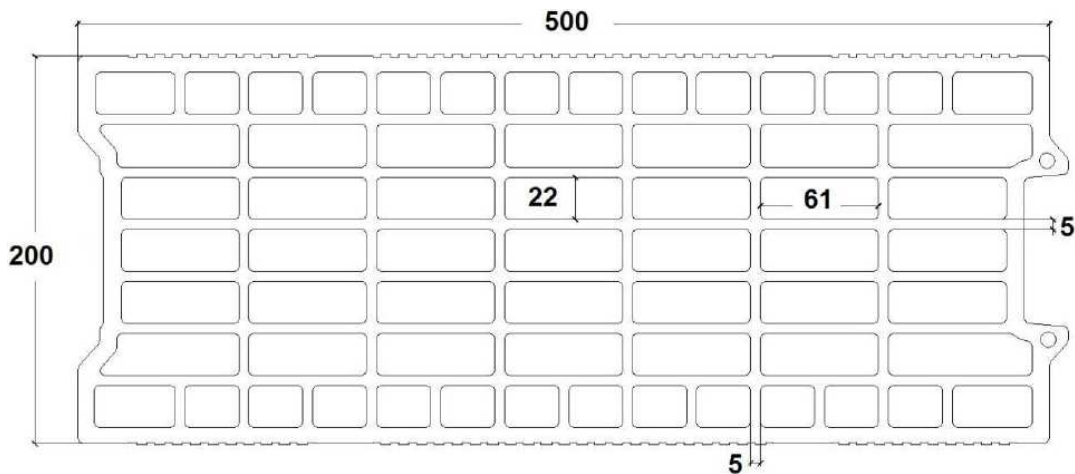

**Table C40: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		$h_{ef}$	$C_{min} = C_{cr}$	$S_{cr} = S_{min II}$	$S_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
<b>M8</b>	VM-SH 12x80	80	100	500	314	2
<b>M8 / M10</b>	VM-SH 16x85	85				4
	VM-SH 16x130	130				
<b>M12 / M16</b>	VM-SH 16x130/330	130	120	500	314	4
	VM-SH 20x85	85				
	VM-SH 20x130	130				

**Table C41: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,27	0,54	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,21	1,81
85		0,39	0,77		2,00	3,01
130		0,16	0,32		1,60	2,39

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Clay hollow brick BGV Thermo**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 22**

**Brick type: Clay hollow brick BGV Thermo**

**Table C42: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$
[mm]	[kN]				
<b>Compressive strength <math>f_b \geq 4 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,5	0,4	2,0
	VM-SH 16x85	85	0,75	0,5	2,0
	VM-SH 16x130	130	0,9	0,75	2,5
	VM-SH 16x130/330	130	0,9	0,75	2,5
<b>M10</b>	VM-SH 16x85	85	0,75	0,5	2,0
	VM-SH 16x130	130	1,2	0,75	2,5
	VM-SH 16x130/330	130	1,2	0,75	2,5
<b>M12</b>	VM-SH 20x85	85	0,75	0,5	2,0
	VM-SH 20x130	130	1,2	0,75	2,5
<b>M16</b>	VM-SH 20x85	85	0,9	0,6	2,0
	VM-SH 20x130	130	1,2	0,75	2,5
<b>Compressive strength <math>f_b \geq 6 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,6	0,5	2,0
	VM-SH 16x85	85	0,9	0,6	2,5
	VM-SH 16x130	130	1,2	0,9	3,0
	VM-SH 16x130/330	130	1,2	0,9	3,0
<b>M10</b>	VM-SH 16x85	85	0,9	0,6	2,5
	VM-SH 16x130	130	1,5	0,9	3,0
	VM-SH 16x130/330	130	1,5	0,9	3,0
<b>M12</b>	VM-SH 20x85	85	0,9	0,6	3,0
	VM-SH 20x130	130	1,5	0,9	3,0
<b>M16</b>	VM-SH 20x85	85	1,2	0,75	3,0
	VM-SH 20x130	130	1,5	0,9	3,0
<b>Compressive strength <math>f_b \geq 10 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,9	0,6	3,0
	VM-SH 16x85	85	1,2	0,9	3,5
	VM-SH 16x130	130	1,5	1,2	4,0
	VM-SH 16x130/330	130	1,5	1,2	4,0
<b>M10</b>	VM-SH 16x85	85	1,2	0,9	3,5
	VM-SH 16x130	130	1,5	1,2	4,0
	VM-SH 16x130/330	130	1,5	1,2	4,0
<b>M12</b>	VM-SH 20x85	85	1,2	0,75	3,5
	VM-SH 20x130	130	1,5	1,2	4,0
<b>M16</b>	VM-SH 20x85	85	1,5	0,9	3,5
	VM-SH 20x130	130	1,5	1,2	4,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Clay hollow brick BGV Thermo**  
Characteristic values of resistance under tension and shear load

**Annex C 23**

## Brick type: Clay hollow brick Calibric Th

**Table C43: Description**

Brick type	Clay hollow brick Calibric Th	
Bulk density [kg/dm <sup>3</sup> ]	0,62	
Compressive strength [N/mm <sup>2</sup> ]	6, 9 or 12	
Code	EN 771-1	
Producer (country code)	e.g. Terreal (FR)	
Brick dimensions [mm]	500 x 200 x 314	
Drilling method	Rotary drilling	

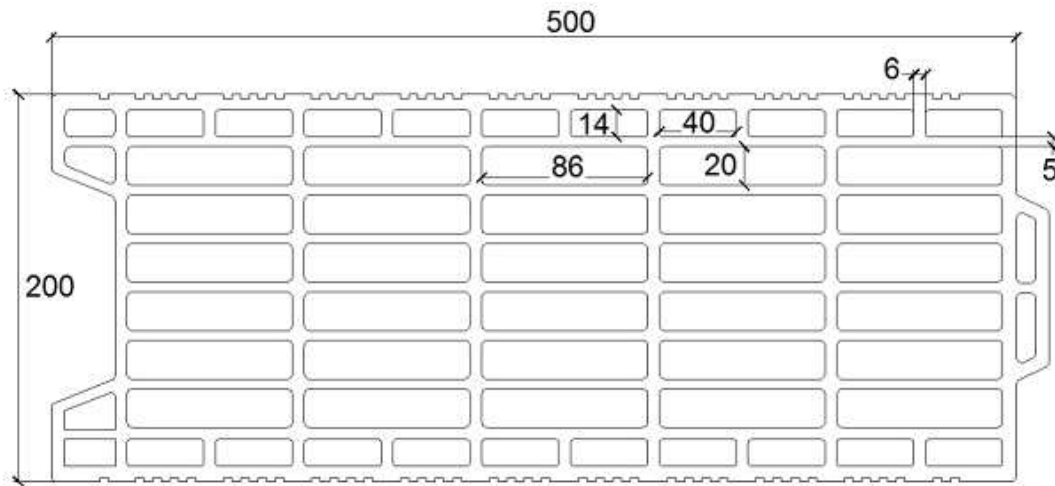

**Table C44: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		$h_{ef}$	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel}$	$s_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
<b>M8</b>	VM-SH 12x80	80	100	500	314	2
<b>M8 / M10</b>	VM-SH 16x85	85				
	VM-SH 16x130	130				
	VM-SH 16x130/330	130				
<b>M12 / M16</b>	VM-SH 20x85	85	120	500	314	2
	VM-SH 20x130	130				

**Table C45: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,48	0,96	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,18	1,78
85		0,49	0,98		2,20	3,30
130		0,37	0,74		2,31	3,46

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Clay hollow brick Calibric Th**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 24**

**Brick type: Clay hollow brick Calibric Th**

**Table C46: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$		
[mm]	[kN]				
<b>Compressive strength <math>f_b \geq 6 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,75	0,5	2,5
	VM-SH 16x85	85	0,75	0,5	3,5
	VM-SH 16x130	130	0,9	0,6	3,5
	VM-SH 16x130/330	130	0,9	0,6	3,5
<b>M10</b>	VM-SH 16x85	85	0,75	0,5	3,5
	VM-SH 16x130	130	0,9	0,6	3,5
	VM-SH 16x130/330	130	0,9	0,6	3,5
<b>M12</b>	VM-SH 20x85	85	0,75	0,5	6,0
	VM-SH 20x130	130	0,9	0,6	6,0
<b>M16</b>	VM-SH 20x85	85	1,2	0,75	6,0
	VM-SH 20x130	130	1,2	0,75	6,0
<b>Compressive strength <math>f_b \geq 9 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,9	0,6	3,5
	VM-SH 16x85	85	0,9	0,6	4,5
	VM-SH 16x130	130	1,2	0,75	4,5
	VM-SH 16x130/330	130	1,2	0,75	4,5
<b>M10</b>	VM-SH 16x85	85	0,9	0,6	4,5
	VM-SH 16x130	130	1,2	0,9	4,5
	VM-SH 16x130/330	130	1,2	0,9	4,5
<b>M12</b>	VM-SH 20x85	85	0,9	0,6	7,5
	VM-SH 20x130	130	1,2	0,9	7,5
<b>M16</b>	VM-SH 20x85	85	1,5	0,9	7,5
	VM-SH 20x130	130	1,5	0,9	7,5
<b>Compressive strength <math>f_b \geq 12 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,9	0,75	4,0
	VM-SH 16x85	85	0,9	0,75	5,5
	VM-SH 16x130	130	1,2	0,9	5,5
	VM-SH 16x130/330	130	1,2	0,9	5,5
<b>M10</b>	VM-SH 16x85	85	0,9	0,75	5,5
	VM-SH 16x130	130	1,5	0,9	5,5
	VM-SH 16x130/330	130	1,5	0,9	5,5
<b>M12</b>	VM-SH 20x85	85	0,9	0,75	8,5
	VM-SH 20x130	130	1,5	0,9	8,5
<b>M16</b>	VM-SH 20x85	85	1,5	1,2	8,5
	VM-SH 20x130	130	1,5	1,2	8,5

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Clay hollow brick Calibric Th**  
Characteristic values of resistance under tension and shear load

**Annex C 25**

**Brick type: Clay hollow brick Urbanbric**

**Table C47: Description**

Brick type	Clay hollow brick Urbanbric	
Bulk density [kg/dm <sup>3</sup> ]	0,74	
Compressive strength [N/mm <sup>2</sup> ]	6 or 9	
Code	EN 771-1	
Producer (country code)	e.g. Imerys (FR)	
Brick dimensions [mm]	560 x 200 x 274	
Drilling method	Rotary drilling	

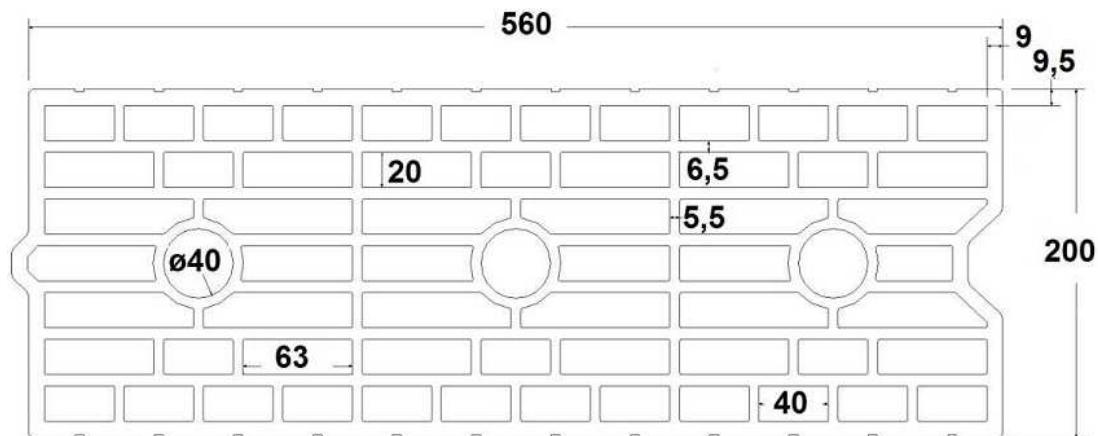

**Table C48: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		$h_{ef}$	$C_{min} = C_{cr}$	$S_{cr} = S_{min II}$	$S_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
<b>M8</b>	VM-SH 12x80	80	100	560	274	2
<b>M8 / M10</b>	VM-SH 16x85	85				
	VM-SH 16x130	130				
<b>M12 / M16</b>	VM-SH 16x130/330	130	120	560	274	2
	VM-SH 20x85	85				
	VM-SH 20x130	130				

**Table C49: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,34	0,67	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0,71	1,06
85		0,52	1,04		1,37	2,06
130		0,62	1,24		1,62	2,44

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Clay hollow brick Calibric Th**  
 Brick description, drawing,  
 Installation parameters, Displacements

**Annex C 26**

**Brick type: Clay hollow brick Urbanbric**

**Table C50: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$		
[mm]	[kN]				
<b>Compressive strength <math>f_b \geq 6 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,9	0,75	3,0
<b>M8 / M10</b>	VM-SH 16x85	85	1,2	0,75	3,5
	VM-SH 16x130	130	1,5	1,2	3,5
	VM-SH 16x130/330	130	1,5	1,2	3,5
<b>M12 / M16</b>	VM-SH 20x85	85	1,2	0,75	4,0
	VM-SH 20x130	130	1,5	1,2	4,0
<b>Compressive strength <math>f_b \geq 9 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	1,2	0,9	3,5
<b>M8 / M10</b>	VM-SH 16x85	85	1,5	0,9	4,0
	VM-SH 16x130	130	2,0	1,5	4,5
	VM-SH 16x130/330	130	2,0	1,5	4,5
<b>M12 / M16</b>	VM-SH 20x85	85	1,5	0,9	5,0
	VM-SH 20x130	130	2,0	1,5	5,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Clay hollow brick Calibric Th**  
Characteristic values of resistance under tension and shear load

**Annex C 27**

## Brick type: Clay hollow brick Blocchi Leggeri

**Table C51: Description**

Brick type	Clay hollow brick Blocchi Leggeri	
Bulk density [kg/dm <sup>3</sup> ]	0,55	
Compressive strength [N/mm <sup>2</sup> ]	4, 6 or 8	
Code	EN 771-1	
Producer (country code)	e.g. Wienerberger (IT)	
Brick dimensions [mm]	250 x 120 x 250	
Drilling method	Rotary drilling	

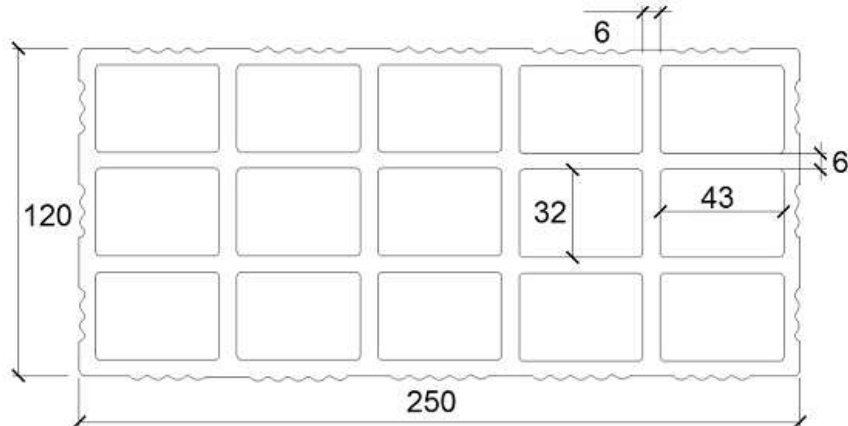

**Table C52: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
				$S_{cr} = S_{min \parallel}$	$S_{min \perp}$	
		$h_{ef}$	$C_{min} = C_{cr}$	[mm]		$T_{inst,max}$
						[Nm]
<b>M8</b>	VM-SH 12x80	80	100	250	250	4
<b>M8 / M10</b>	VM-SH 16x85	85				
	VM-SH 16x130	130				
	VM-SH 16x130/330	130				
<b>M12 / M16</b>	VM-SH 20x85	85	120	250	250	4
	VM-SH 20x130	130				
	VM-SH 20x200	200				

**Table C53: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,32	0,64	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,16	1,74
85		0,26	0,53		2,52	3,78
130 ; 200		0,32	0,64		2,52	3,78

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Clay hollow brick Blocchi Leggeri**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 28**



**Brick type: Clay hollow brick Blocchi Leggeri**

**Table C54: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$ [mm]	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$	[kN]	
<b>Compressive strength <math>f_b \geq 4 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,4	0,3	2,0
<b>M8 / M10</b>	VM-SH 16x85	85	0,4	0,3	2,0
	VM-SH 16x130	130	0,5	0,3	2,0
	VM-SH 16x130/330	130	0,5	0,3	2,0
<b>M12 / M16</b>	VM-SH 20x85	85	0,4	0,3	2,0
	VM-SH 20x130	130	0,5	0,3	2,0
	VM-SH 20x200	200	0,5	0,3	2,0
<b>Compressive strength <math>f_b \geq 6 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,5	0,3	2,0
<b>M8 / M10</b>	VM-SH 16x85	85	0,5	0,3	2,0
	VM-SH 16x130	130	0,6	0,4	2,0
	VM-SH 16x130/330	130	0,6	0,4	2,0
<b>M12 / M16</b>	VM-SH 20x85	85	0,5	0,3	2,5
	VM-SH 20x130	130	0,6	0,4	2,5
	VM-SH 20x200	200	0,6	0,4	2,5
<b>Compressive strength <math>f_b \geq 8 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,6	0,4	2,5
<b>M8 / M10</b>	VM-SH 16x85	85	0,6	0,4	2,5
	VM-SH 16x130	130	0,6	0,5	2,5
	VM-SH 16x130/330	130	0,6	0,5	2,5
<b>M12 / M16</b>	VM-SH 20x85	85	0,6	0,4	3,0
	VM-SH 20x130	130	0,6	0,5	3,0
	VM-SH 20x200	200	0,6	0,5	3,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Clay hollow brick Blocchi Leggeri**  
Characteristic values of resistance under tension and shear load

**Annex C 29**

## Brick type: Clay hollow brick Doppio Uni

**Table C55: Description**

Brick type	Clay hollow brick Doppio Uni	
Bulk density [kg/dm <sup>3</sup> ]	0,92	
Compressive strength [N/mm <sup>2</sup> ]	10, 16, 20 or 28	
Code	EN 771-1	
Producer (country code)	e.g. Wienerberger (IT)	
Brick dimensions [mm]	250 x 120 x 120	
Drilling method	Rotary drilling	

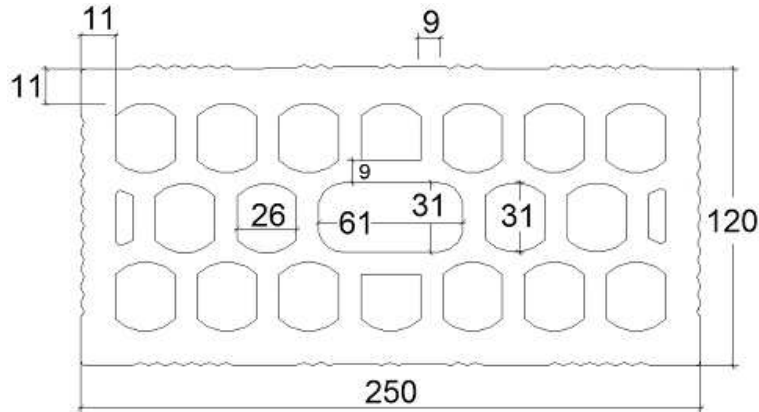

**Table C56: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque			
				$h_{ef}$	$C_{min} = C_{cr}$		$S_{cr} = S_{min \parallel}$	$S_{min \perp}$	$T_{inst,max}$
				[mm]				[Nm]	
<b>M8</b>	VM-SH 12x80	80	100	250	120	4			
<b>M8 / M10</b>	VM-SH 16x85	85							
	VM-SH 16x130	130							
	VM-SH 16x130/330	130							
<b>M12 / M16</b>	VM-SH 20x85	85	120	250	120	4			
	VM-SH 20x130	130							
	VM-SH 20x200	200							

**Table C57: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,54	1,08	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1,63	2,45
85		0,17	0,34		1,75	2,63
130 ; 200		0,54	1,08		1,75	2,63

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Clay hollow brick Doppio Uni**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 30**

**Brick type: Clay hollow brick Doppio Uni**

**Table C58: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d	w/d	w/w
			40°C / 24°C	80°C / 50°C	For all temperature range
		$h_{ef}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$
		[mm]	[kN]		
<b>Compressive strength <math>f_b \geq 10 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,9	0,6	2,0
<b>M8 / M10</b>	VM-SH 16x85	85	0,9	0,6	2,0
	VM-SH 16x130	130	0,9	0,6	2,0
	VM-SH 16x130/330	130	0,9	0,6	2,0
<b>M12 / M16</b>	VM-SH 20x85	85	1,2	0,75	2,0
	VM-SH 20x130	130	1,2	0,75	2,0
	VM-SH 20x200	200	1,2	0,75	2,0
<b>Compressive strength <math>f_b \geq 16 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,9	0,75	2,5
<b>M8 / M10</b>	VM-SH 16x85	85	1,2	0,9	2,5
	VM-SH 16x130	130	1,2	0,9	2,5
	VM-SH 16x130/330	130	1,2	0,9	2,5
	VM-SH 20x85	85	1,5	0,9	2,5
<b>M12 / M16</b>	VM-SH 20x130	130	1,5	0,9	2,5
	VM-SH 20x200	200	1,5	0,9	2,5
	<b>Compressive strength <math>f_b \geq 20 \text{ N/mm}^2</math></b>				
<b>M8</b>	VM-SH 12x80	80	1,2	0,75	3,0
<b>M8 / M10</b>	VM-SH 16x85	85	1,2	0,9	3,0
	VM-SH 16x130	130	1,5	0,9	3,0
	VM-SH 16x130/330	130	1,5	0,9	3,0
	VM-SH 20x85	85	1,5	0,9	3,0
<b>M12 / M16</b>	VM-SH 20x130	130	1,5	0,9	3,0
	VM-SH 20x200	200	1,5	0,9	3,0
	<b>Compressive strength <math>f_b \geq 28 \text{ N/mm}^2</math></b>				
<b>M8</b>	VM-SH 12x80	80	1,5	0,9	3,5
<b>M8 / M10</b>	VM-SH 16x85	85	1,5	1,2	3,5
	VM-SH 16x130	130	1,5	1,2	3,5
	VM-SH 16x130/330	130	1,5	1,2	3,5
	VM-SH 20x85	85	2,0	1,2	3,5
<b>M12 / M16</b>	VM-SH 20x130	130	2,0	1,2	3,5
	VM-SH 20x200	200	2,0	1,2	3,5

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Clay hollow brick Doppio Uni**  
Characteristic values of resistance under tension and shear load

**Annex C 31**

**Brick type: Hollow Light weight concrete Bloc creux B40**

**Table C59: Description**

Brick type	Hollow light weight concrete Bloc creux B40	
Bulk density [kg/dm <sup>3</sup> ]	0,8	
Compressive strength [N/mm <sup>2</sup> ]	4	
Code	EN 771-3	
Producer (country code)	e.g. Sepa (FR)	
Brick dimensions [mm]	494 x 200 x 190	
Drilling method	Rotary drilling	

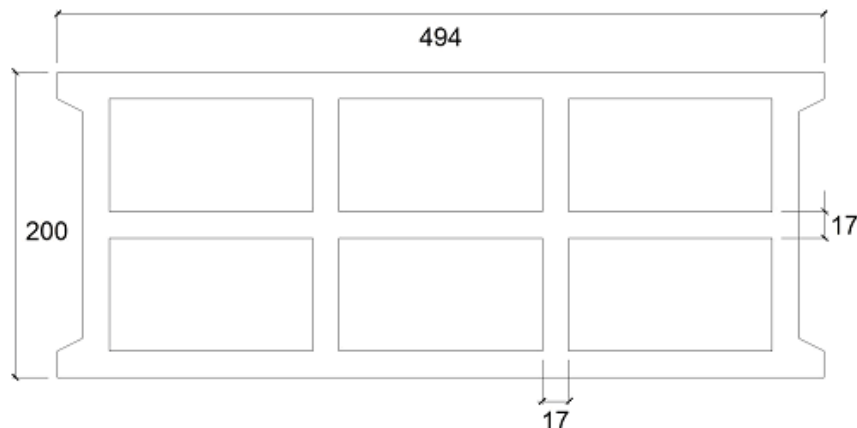

**Table C60: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth $h_{ef}$	Edge distance $C_{min} = C_{cr}$	Spacing		Maximum installation torque $T_{inst,max}$
				$S_{cr} = S_{min \parallel}$	$S_{min \perp}$	
				[mm]		
<b>M8</b>	VM-SH 12x80	80	100	494	190	2
<b>M8 / M10</b>	VM-SH 16x85	85				
	VM-SH 16x130	130				
	VM-SH 16x130/330	130				
<b>M12 / M16</b>	VM-SH 20x85	85	120	494	190	2
	VM-SH 20x130	130				

**Table C61: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,14	0,29	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0,25	0,37
85		0,45	0,90		0,98	1,47
130		0,61	1,22		1,10	1,65

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance hollow light weight concrete Bloc creux B40**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 32**

**Brick type: Hollow Light weight concrete Bloc creux B40**

**Table C62: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$		
[mm]	[kN]				
<b>Compressive strength <math>f_b \geq 4 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	0,4	0,3	1,2
	VM-SH 16x85	85	0,6	0,5	3,0
	VM-SH 16x130	130	2,0	1,5	3,5
	VM-SH 16x130/330	130	2,0	1,5	3,5
<b>M10</b>	VM-SH 16x85	85	0,6	0,5	3,0
	VM-SH 16x130	130	2,0	1,5	3,5
	VM-SH 16x130/330	130	2,0	1,5	3,5
<b>M12</b>	VM-SH 20x85	85	0,9	0,6	3,0
	VM-SH 20x130	130	2,0	1,5	3,5
<b>M16</b>	VM-SH 20x85	85	0,9	0,6	3,0
	VM-SH 20x130	130	2,0	1,5	3,5

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance hollow light weight concrete Bloc creux B40**  
Characteristic values of resistance under tension and shear load

**Annex C 33**

**Brick type: Solid light weight concrete brick**

**Table C63: Description**

Brick type	Solid light weight concrete brick	
Bulk density [kg/dm <sup>3</sup> ]	0,63	
Compressive strength [N/mm <sup>2</sup> ]	2	
Code	EN 771-3	
Producer (country code)	e.g. Bisotherm (DE)	
Brick dimensions [mm]	300 x 123 x 248	
Drilling method	Rotary drilling	

**Table C64: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing	Maximum installation torque
		$h_{ef}$	$c_{min} = c_{Cr}$	$s_{Cr} = s_{min \parallel} = s_{min \perp}$	
			[mm]		[Nm]
<b>M8</b>	-	80	120	240	6
<b>M10</b>	-	90	135	270	
<b>M12</b>	-	100	150	300	10
<b>M16</b>	-	100	150	300	14

**Table C65: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,64	1,28	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0,50	0,75
90		0,70	1,41		0,68	1,03
100		0,21	0,42		0,54	0,81

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance Solid light weight concrete LAC**  
Brick description, drawing,  
Installation parameters, Displacements

**Brick type: Solid light weight concrete brick**

**Table C66: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$		
[mm]	[kN]				
<b>Compressive strength <math>f_b \geq 2 \text{ N/mm}^2</math></b>					
<b>M8</b>	-	80	2,0	1,5	3,0
<b>M10</b>	-	90	2,0	1,5	3,5
<b>M12</b>	-	100	2,0	1,5	4,0
<b>M16</b>	-	100	2,0	1,5	4,0

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**


**Performance Solid light weight concrete LAC**  
Characteristic values of resistance under tension and shear load

**Annex C 35**

**Brick type: Hollow light weight concrete brick – Leca Lex harkko RUH-200**

**Table C67: Description**

Brick type	Hollow light weight concrete Leca Lex harkko RUH-200	
Bulk density [kg/dm³]	0,7	
Compressive strength [N/mm²]	2,7	
Code	EN 771-3	
Producer (country code)	e.g. Saint-Gobain Weber (Fin)	
Brick dimensions [mm]	498 x 200 x 195	
Drilling method	Rotary drilling	

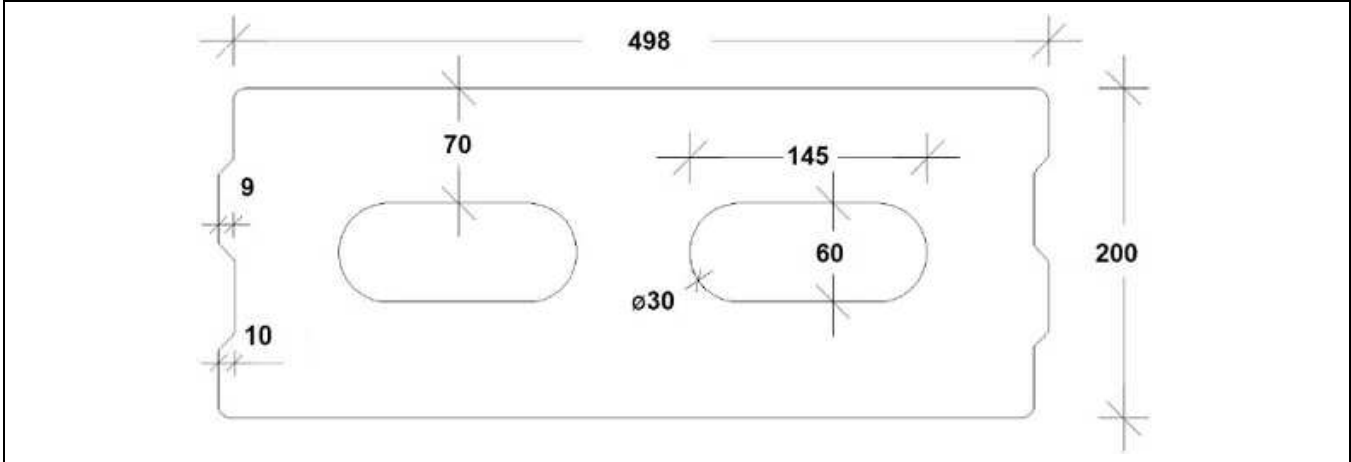

**Table C68: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		$h_{ef}$	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel}$	$s_{min \perp}$	$T_{inst,max}$
		[mm]				[Nm]
<b>M8</b>	VM-SH 12x80	80	120	498	195	8
<b>M8 / M10</b>	VM-SH 16x85	85	127			
	VM-SH 16x130	130	195			
	VM-SH 16x130/330	130	195			
<b>M12 / M16</b>	VM-SH 20x85	85	127			
	VM-SH 20x130	130	195			

**Table C69: Displacement**

Effective anchorage depth $h_{ef}$	N	$\delta_{N0}$	$\delta_{N\infty}$	V	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,11	0,22	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0,47	0,70
85		0,11	0,23		0,38	0,57
130		0,10	0,20		0,56	0,85

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance LECA LEX harkko RUH-200 Hollow**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 36**



**Brick type: Hollow light weight concrete brick – Leca Lex harkko RUH-200**

**Table C70: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$		
[mm]	[kN]				
<b>Compressive strength <math>f_b \geq 2,7 \text{ N/mm}^2</math></b>					
<b>M8</b>	VM-SH 12x80	80	2,0	1,2	2,5
	VM-SH 16x85	85	2,0	1,2	3,5
	VM-SH 16x130	130	2,5	1,5	3,5
	VM-SH 16x130/330	130	2,5	1,5	3,5
<b>M10</b>	VM-SH 16x85	85	2,0	1,5	3,5
	VM-SH 16x130	130	2,5	1,5	3,5
	VM-SH 16x130/330	130	2,5	1,5	3,5
<b>M12</b>	VM-SH 20x85	85	2,5	1,5	3,5
	VM-SH 20x130	130	2,5	1,5	3,5
<b>M16</b>	VM-SH 20x85	85	2,5	1,5	3,5
	VM-SH 20x130	130	2,5	1,5	3,5

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C


**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance LECA LEX harkko RUH-200 Hollow**  
 Characteristic values of resistance under tension and shear load  
 Displacement

**Annex C 37**

**Brick type: Solid light weight concrete brick – Leca Lex harkko RUH-200 kulma**

**Table C71: Description**

Brick type	Solid light weight concrete Leca Lex harkko RUH-200 kulma	
Bulk density [kg/dm <sup>3</sup> ]	0,78	
Compressive strength [N/mm <sup>2</sup> ]	3	
Code	EN 771-3	
Producer (country code)	e.g. Saint-Gobain Weber (Fin)	
Brick dimensions [mm]	498 x 200 x 195	
Drilling method	Rotary drilling	

**Table C72: Installation parameter (Edge and spacing distances)**

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing	Maximum installation torque
		$h_{ef}$	$c_{min} = c_{cr}$	$s_{cr} = s_{min II} = s_{min \perp}$	$T_{inst,max}$
		[mm]			[Nm]
<b>M8</b>	-	80	120	240	6
<b>M10</b>	-	90	135	270	12
<b>M12</b>	-	100	150	300	14
<b>M16</b>	-	100	150	300	16
<b>M8</b>	VM-SH 12x80	80	120	240	8
<b>M8 / M10</b>	VM-SH 16x85	85	127	255	
	VM-SH 16x130	130	195	390	
	VM-SH 16x130/330	130	195	390	
<b>M12 / M16</b>	VM-SH 20x85	85	127	255	12
	VM-SH 20x130	130	195	390	16

**Table C73: Displacement**

Effective anchorage depth $h_{ef}$	<b>N</b>	$\delta_{N0}$	$\delta_{N\infty}$	<b>V</b>	$\delta_{V0}$	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0,09	0,18	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0,48	0,72
85		0,07	0,15		0,77	1,15
90		0,13	0,26		0,26	0,39
100		0,13	0,23		0,36	0,54
130		0,10	0,21		0,68	1,01

**Injection System VM-EA, VM-EA express, VM-EA low speed for masonry**

**Performance LECA LEX harkko RUH-200 Kulma Solid**  
Brick description, drawing,  
Installation parameters, Displacements

**Annex C 38**

**Brick type: Solid light weight concrete brick – Leca Lex harkko RUH-200 kulma**

**Table C74: Characteristic values of resistance under tension and shear loads**

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
$h_{ef}$	$N_{Rk}^{1)}$	$N_{Rk}^{1)}$	$V_{Rk,b}^{2)}$		
[mm]	[kN]				
<b>Compressive strength <math>f_b \geq 3,0 \text{ N/mm}^2</math></b>					
<b>M8</b>	-	80	2,0	1,2	3,0
<b>M10</b>	-	90	3,0	2,0	4,0
<b>M12</b>	-	100	3,0	2,0	4,0
<b>M16</b>	-	100	3,0	2,0	4,0
<b>M8</b>	VM-SH 12x80	80	2,0	1,2	3,0
	VM-SH 16x85	85	2,0	1,5	3,5
	VM-SH 16x130	130	3,0	2,0	4,0
	VM-SH 16x130/330	130	3,0	2,0	4,0
<b>M10</b>	VM-SH 16x85	85	2,0	1,5	3,5
	VM-SH 16x130	130	3,0	2,0	4,0
	VM-SH 16x130/330	130	3,0	2,0	4,0
<b>M12 / M16</b>	VM-SH 20x85	85	2,0	1,5	4,5
	VM-SH 20x130	130	3,0	2,0	4,5

<sup>1)</sup> For design according ETAG 029, Annex C:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see ETAG 029, Annex C

<sup>2)</sup> For  $V_{Rk,s}$  see Annex C 2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see ETAG 029, Annex C